

PRODUCT _____ QUANTITY _____ ITEM # _____

Designed Smart

Developed for high output in tight spaces!

- The AT Express™ generates over 300 slices of toast per hour.
- Designed to fit into tight space areas on counters.
- Toasters have extended super feeder and warming area to allow for high volume production.
- Unique warming area keeps toast at the perfect temperature until you are ready to serve.

Maximum Versatility!

- A variable speed control for the conveyor produces optimum results in toasting color and texture.
- Ability to turn off either the top or bottom element for one-sided toasting.
- Able to handle a variety of breads or bagels

Safest Toaster in the Industry!

- Protects your employees with “Cool Touch” exteriors...both sides and top surfaces.

Easy to Maintain and Service!

- Conveyors and crumb trays are easily accessible and simple to clean.
- Removable Side panel allows easy access for service.

Cool Touch Feature

- “Cool Touch” feature protects employees from burns by keeping exteriors at “Xtreme Cool” temperatures
- At-Express air circulation system keeps cooling air circulating in toaster, even after the power switch is turned off protecting com-

Built Solid

Built to Last

- Stainless Steel construction protects against kitchen wear and tear and rust.
- Metal sheathed heating elements offer enhanced durability and consumer safety vs. quartz tube heating elements.
- High temperature insulated wire is used for long life.
- High temperature bearing never require lubrication.



AT EXPRESS RADIANT CONVEYOR TOASTER

APW Wyott Design Features

- All stainless steel construction.
- Small footprint (13 1/2" x 17 2/11") fits into tight counter space.
- 120V/60Hz or 230V/50Hz equipment with high output.
- Insulated and air cooled.
- Self-dispensing bread drawer slides forward for removal of product.
- Super feeder included.
- One sided toasting.
- High temperature bearings.

Reliability backed by APW Wyott's Warranty

- All APW Wyott toasters are backed by a 2-year parts and labor warranty, including on-site service calls within 50 miles of authorized service technicians.
- Certified by the following agencies

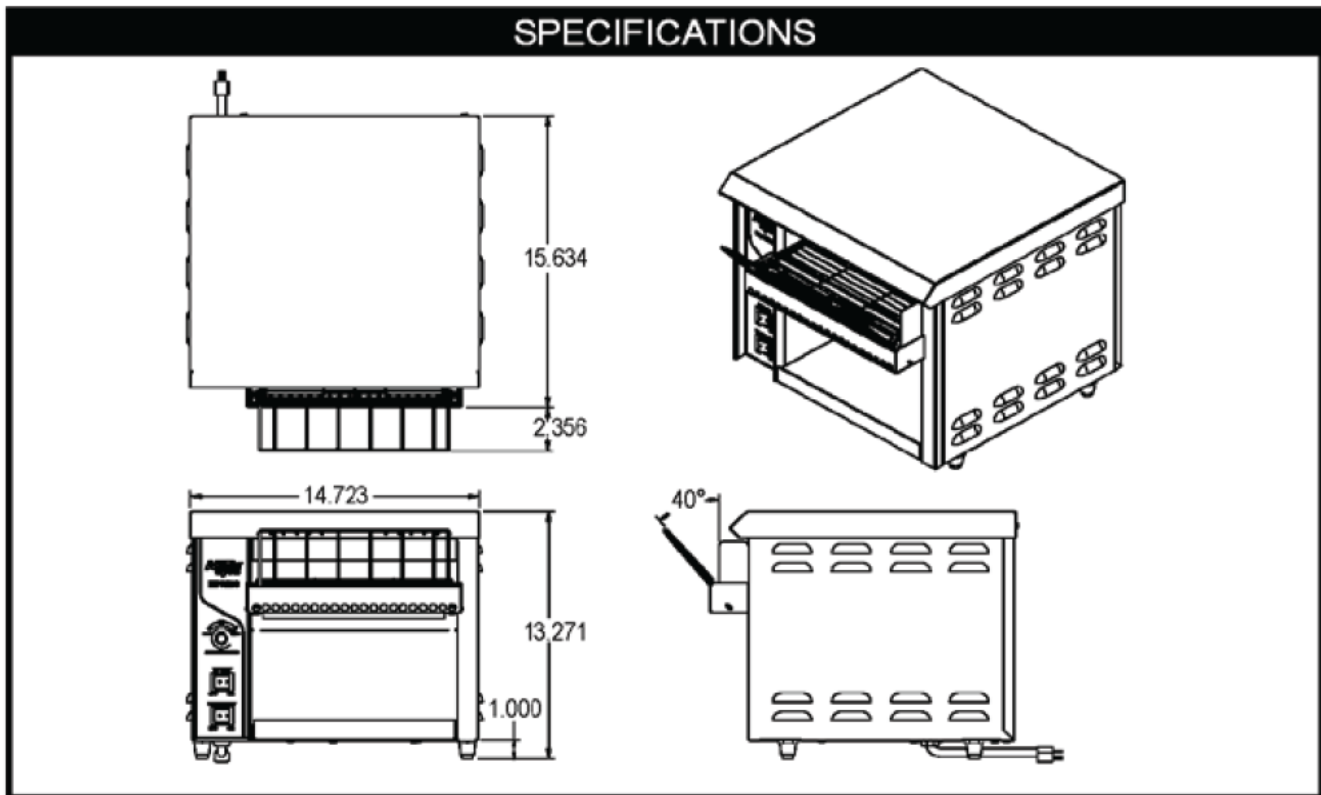


See reverse side for product specifications.

PRODUCT:

QUANTITY:

ITEM #:

**Construction:**

Stainless steel housing and radiant reflector. Metal sheathed heating elements. Stainless steel front wire guard. High temperature insulation protects control panel and exteriors.

Electrical Information:

Each unit is equipped with at least a 39", three wire grounded power cord which terminates with a standard three-pronged male plug. The U.S. 120V unit utilizes a NEMA 5-15P plug and the Canadian 120V unit utilizes a 5-20P plug. The 208V, 240V, and 230V all use a NEMA 6-20P.

Electrical Specifications:

AT Express 120V: 120V, 1725W, 14.4 amps AT Express 230V: 230V, 1725W, 7.5 amps

Capacity:

Up to 300 pieces per hour.

Overall Dimensions:

13 1/4"H x 15 3/64"W x 17 3/16"D (16 3/4" w/o plug)(33.66cm x 38.21cm x 43.66cm)

Shipping:

35 lbs (16 kg)

Freight Class 100

FOB: Dallas, TX