

# OPTIMA® SMOOTH™ AUTO-FLUSH UNIT

The **SMOOTH™ AUTO-FLUSH UNIT** will provide the ultimate in sanitary protection and automatic operation. There is no need for AC hookups or wall alterations. The unit operates by means of a battery-powered infrared sensor. Once the user enters the sensor's effective range and then steps away, the unit initiates the flushing cycle to flush the fixture. State-of-the-art technology enables activation of a manual override without "double flushing" occurring as the user departs by locking out the sensor for approximately 10 seconds.

The **SMOOTH™ AUTO-FLUSH UNIT** retrofit kit is the next advancement in hygiene. It uses sensor technology to transform manual installations into electronic, hands-free operations. The user makes no physical contact with the unit surface except to initiate the Override Handle when required. The **SMOOTH™ AUTO-FLUSH UNIT** helps control the spread of infectious diseases.

Automatic operation will provide water usage savings as compared to other flushing devices. The **SMOOTH™ AUTO-FLUSH UNIT** reduces maintenance and operation costs. Installation and battery replacement does not require turning off water to the valve.



## SMOOTH™ AUTO-FLUSH UNIT

PRODUCT NO. 100

Packed individually - Weight 2.8 lbs.  
6 per shipping case - Weight 17.6 lbs.

## DESCRIPTION

Battery-Powered, Sensor-Activated Retrofit Unit for Exposed Closet and Urinal Flushometers

## SPECIFICATIONS

Battery Powered, Sensor Activated, Exposed, **SMOOTH™** Unit for Closet and Urinal Flushometer Conversions with the following features:


- ADA Compliant **SMOOTH™** Battery Powered Infrared Sensor for automatic hands-free operation
- Sensor with Automatic Range Adjustment
- Chrome Plated Metal Sensor Housing
- Mechanical Manual Override Flush Handle
- Four (4) Size C Batteries included
- "Low Battery" Flashing LED
- "User in View" Flashing LED
- Sentinel Flush Mode
- Vandal Resistant 1/8" Ball-Type Hex Key included

## FEATURES

- 25 to 80 psi Operating Range
- Infrared Sensing with Automatic Adjustment
- Mechanical Manual Override
- Four (4) replaceable Size C Batteries
- ADA Compliant

## EASY INSTALLATION

Works out of the box and installs in minutes. Simply slide the unit over the Flushometer handle and tighten the clamp.

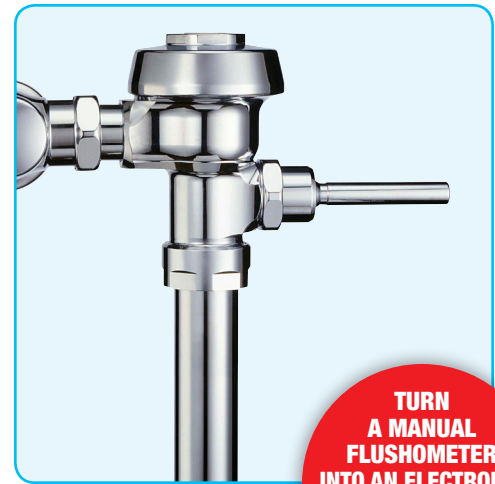

**TURN  
A MANUAL  
FLUSHOMETER  
INTO AN ELECTRONIC  
FLUSHOMETER IN  
LESS THAN A  
MINUTE**



## **BIG D INDUSTRIES, INC.**

PO Box 82219  
Oklahoma City, OK 73148  
1-800-654-4752  
[www.bigdind.com](http://www.bigdind.com)