# **BUNN**<sup>®</sup>

ITEM#			

**PROJECT** 

# Twin Airpot Coffee Brewer

DATE



#### **Model CWTF Twin APS** with Airpots

(airpots sold separately) Dimensions: 23.5" H x 16" W x 19.7" D (59.7cm H x 40.6cm W x 50.0cm D)

#### Features

#### Twin Airpot Coffee Brewer

- Brews 15 gallons (56.8 litres) of perfect coffee per hour.
- · Brews directly into 1.9 to 3 litre airpots.
- Twin brew head system.
- Hot water faucet.
- Convenient airpots keep coffee hot and fresh for hours.
- Airpots are easily transported to remote meeting rooms, breakfast bars, etc.
- Digital timer enables users to make brew cycle adjustments from the front panel.
- · Pourover feature on both sides.
- SplashGard® funnel deflects hot liquids away from the hand.
- Gourmet funnel model available for use with heavier throw weights of coffee.

For current specification sheets and other information, go to www.bunn.com.

### Related Products

Easy Clear® EQHP-10 Product No.: 39000.0004

Easy Clear® EQHP-10L Product No.: 39000.0001



2.2 liter Push-Button Airpot Product No.: 28696.0002

Capacity: 74 oz. (2.19 L)

2.5 liter Push-Button Airpot Product No.: 13041.0001 Capacity: 84 oz. (2.48 L)

2.5 liter Lever-Action Airpot Product No.: 32125.0000

3.0 liter Lever-Action Airpot Product No.: 32130.0000

Capacity: 102 oz. (3.0 L)



**Universal Airpot Racks** for push-button and leveraction airpots. See page A3.9 for more

information.



**Gourmet C Funnel** 


Product No.: 34559.0000 (7.12 inch width) 34559.0001 (7.62 inch width)

Universal design - handle

- may be moved to appropriate
- Allows brewing with heavier throw weights of coffee.

Paper Filter Pack Product No.: 20100.0000 Packed per case: 1,000







Model **Agency Listing CWTF Twin APS** (UL) (NSE)

## **Dimensions & Specifications**

Model	Product #	Volts	Amps	Tank Heater		•	Cu.	Shipping	Cord
				Watts	Watts	Capacity	Ft.	Weight	Attached
CWTF Twin APS	23400.0041	120/240	25.8	2 @ 3000	6250	15 gal./hr.	6.4	60 lbs.	No
CWTF Twin APS*	23400.0046	120/240	27	2 @ 3000	6250	15 gal./hr.	8.4	60 lbs.	No


Airpots not included \*Model has gourmet funnel.

Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: 3-wires plus ground service rated 120/240V, single phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with  $\frac{3}{8}$ " male flare fitting.

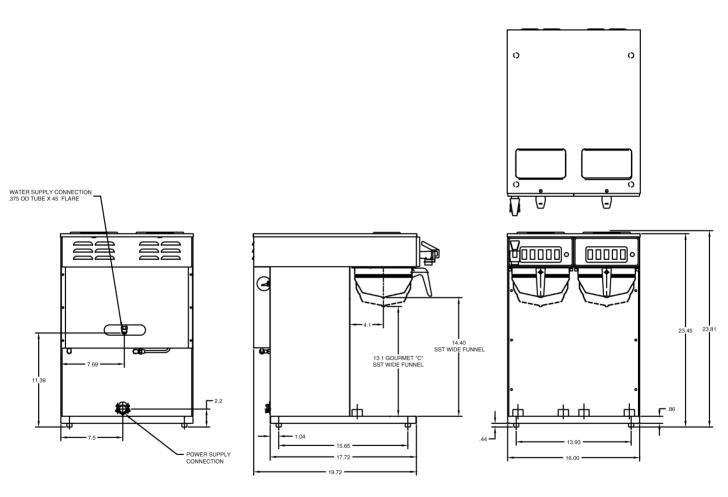

Bunn-O-Matic® Corporation