BUNN

iMIX® Silver Series® Oatmeal System with 3 Hoppers

ITEM#

PROJECT

DATE



Features

iMIX Silver Series Oatmeal System

- · Serves three instant oatmeals.
- · Large, lighted front graphics for merchandising.
- 4.3-gallon (16.3L) hot water tank to meet peak serving times.
- Key service components easily accessible through front, top and easily removable side panels.
- Front of machine access to tank drain, dump valves, auger motors and control board for easy service.
- · Contemporary styling for striking visual statement.
- · Spring-loaded, all metal auger drive system for easy hopper installation.
- · Front-of-machine set up and calibration.
- · Adjustable drip tray.
- Top-hinged design minimizes machine footprint.
- Push and hold dispense.
- Hot water dispense button allows customers to adjust oatmeal thickness to their preference.



iMIX-3S Oatmeal

Dimensions: 33.4"H x 12.5" W x 24.1" D (84.8cm H x 31.8cm W x 61.2cm D)

For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear® EQHP-10 Product No.: 39000.0004

Easy Clear® EQHP-10L Product No.: 39000.0001



Model

Agency Listing

iMIX-3S Oatmeal



Dimensions & Specifications

Model	Product #	Volts	Amps	Watts	Capacity	Cubic Measure	Shipping Weight	Cord Attached
iMIX-3S Oatmeal	38600.0054	120	15	1800	4.5 gal/hr	8.3 ft ³	90 lbs	Yes*


^{*}Power cord (NEMA 5-15P) 15 Amp-120V machine only.

Electrical: 120V model requires 2-wires plus ground service rated 120V, single phase, 60 Hz.

Plumbing: 20-100 psi (138-690 kPa) from a 1/4" (6.4 mm) or larger supply line. A shut-off valve should be installed in the line

before the unit. Install a regulator in line when pressure is greater than 90 psi to reduce it to 50 psi. Supplied with

1/4" (6.4 mm) male flare fitting.

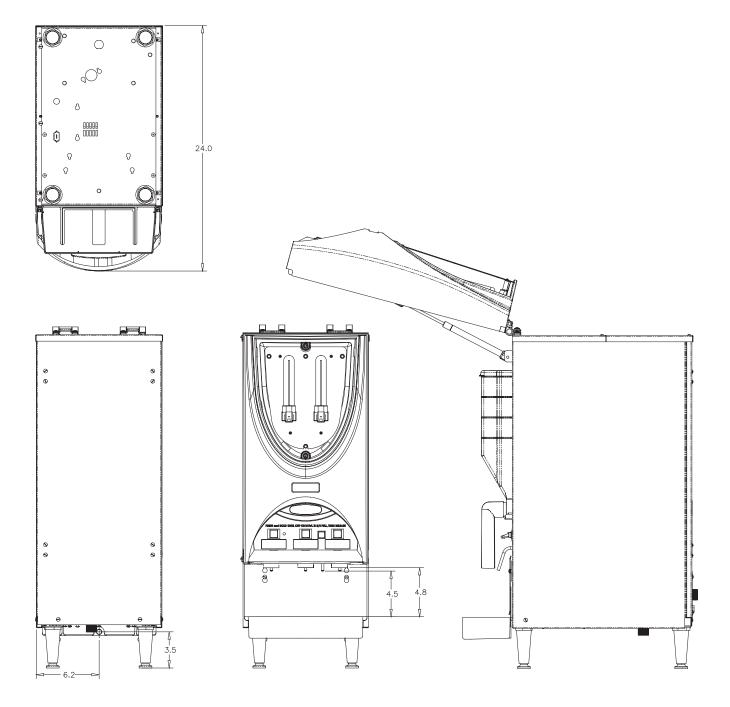

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com