CAMBRO

Ultra Pan Carrier®S-Series

Side Loading

For GN Food Pans Model UPCS400

Features & Benefits



- Stylish, economical catering workhorse built to withstand the tough demands of catering and food delivery! Perfect for transporting hot or cold food to off premise events, corporate parties or delivering food from central kitchens to satellite locations.
- · Combining a sleek, contemporary appearance with durable construction and reliable holding performance, the UPCS400 provides an exact fit for the following GN 1/1 Full Size Food Pans plus equivalent combinations of full-sized and fractional food pans:

4-4" (10 cm) deep. 6-2½" (6.5 cm) deep 3-6" (15 cm) deep, or 2-8" (20 cm) deep

- No removable gasket. Built-in seal offers excellent temperature retention, easier cleaning and reduced replacement costs.
- · No vent cap. Built-in vent automatically equalizes pressure and releases steam as necessary.
- · Menu clip makes content and event name labeling and indentification quick and easy.
- · Built-in pan guides on top provide stable and efficient staging.
- · Polyethylene construction is durable and dishwasher safe.
- · Foamed-in polyurethane insulation helps to ensure hot and cold foods are held at safe temperatures.
- · 9" nylon latch opens and closes easily, secures tightly, and will not
- · Molded-in handles for easy, secure carrying.
- · Stackable with both UPCS400 and UPC400 for convenient transportation and space-saving storage.
- · For best holding results, preheat or pre-chill unit prior to use for 20-30 minutes. Use hot water or ice and keep door closed. Do not use any flame or electrical sources.
- · Store hot and cold foods in the same compartment with the use of the optional ThermoBarrier® Insulated Shelf Divider. Create a portable refrigerator by using the optional Camchiller®. No external power or ice required.
- Maintain hot food holding temperatures at higher levels for up to 2 hours longer by using two Camwarmers™ inside the compartment.
- · Non-electrical.
- · No assembly required.
- Available in 3 colors.

| Item No | |
|-----------------------------|--|
| Specifier Identification No | |
| Model No | |
| Quantity | |



UPCS400 (Shown with Camchiller and ThermoBarrier)




Thick Insulation and Built-in Seal



Menu Clip



Built-in Staging Area



Molded-in Handles

Hot 190°F 186°F 184°F 181°F 179°F 81,7°C 87.8°C 85,6°C 84.5°C 82.8°C Starting 2 hrs. 3 hrs 4 hrs. Temperature Cold 33.9°F 34.1°F 34.7°F 35.2°F 35.8°F 1.05°C 1,2°C 1.5°C 1.8°C 2,1°C Starting 2 hrs. 3 hrs 4 hrs. Temperature

Approvals




Ultra Pan Carrier S-Series

Side Loading

For GN Food Pans Model UPCS400

| 18 (46 cm) | |
|---------------|-------------|
| | 25" (63 cm) |
| <u>CAMBRO</u> | |

| Item No |
|------------------------------|
| Specifier Identification No. |
| Model No. |
| Quantity |

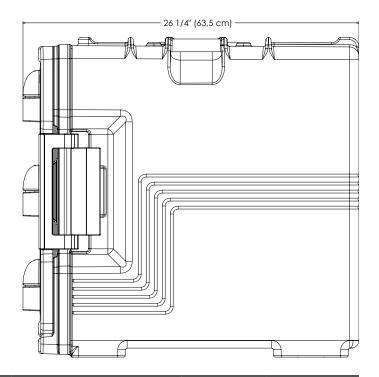

Specifications

Approx. **Exterior Dimensions Description** DxWxH Code Capacity

60 qts. 261/4" x 18" x 25" (63,5 x 46 x 63 cm) Case lbs./Cube Kg/M³

19 (0,020)

4 (0,001)

431/8 (6,9)

9¾ (0,26)

Dimension Tolerance: +/- 1/4" (0,64 cm)

Caster Kit UPCS400CK

UPCS400

2 fixed, 2 swivel, 1 with brake

Ultra Pan Carrier S-Series

Standard Colors

- ☐ Speckled Gray (480)
- ☐ Slate Blue (401)
- ☐ Dark Brown (131)

Optional Accessories

ThermoBarrier® □ 400DIV Gray (180)

Camdolly^e □ CD400 **□** 400STP Strap

Camchiller® ☐ CP1220 Cold Blue (159) Camwarmer® □ 1210PW Granite Gray (191)

Security Latch Package □ H06012

Architect Specs

The non-electrical food service and transport side loading carrier shall be an Ultra Pan Carrier, Model UPCS400, manufactured by Cambro Mfg. Co., Huntington Beach, CA 92647 USA. It shall be made of polyethylene and foaminjected polyurethane. It shall have a built-in vent to help equalize pressure and release steam. It shall have a built-in gasket that is not removable. It shall have a menu clip for labeling contents. It shall have built-in pan guides on top for staging. It shall transport GN Full Size, ½ Size, and ½ Size Food Pans. It shall have a durable nylon door latch and the compartment door shall swing open 270° to the side. It shall have ergonomic molded-in handles located on each of the sides. It shall be available with an optional tamper resistant security package for correctional facility use. It shall require no assembly. It shall be available in 3 colors.

Approvals





© 2006 Cambro Manufacturing Company