

Countertop Display Refrigerators

Giffled

Standard Features

- Choice Model CTR2.68LD with illuminated header display or model CTR3.75 with extra capacity.
- Adjustable Thermostat Temperature can be adjusted between 34°F and 45°F.
- Energy Efficient Double pane thermal glass door with strong magnetic gasket.
- Impulse Sales Merchandise packaged food & beverages.
- ETL Sanitation Conforms To NSF 7 Standard.
- Durable Black Powder Coated Exterior Finish.
- Bright Interior Merchandise Lighting.
- Adjustable PVC Coated Wire Shelves.
- Secure Built-In Door Lock.

Specifications subject to change without notice. Beverages not included.

Cecilware Corporation 43-05 20th. Avenue, LIC NY 11105 Tel: 800.935.2211 / 718.932.1414 • Fax: 718.932.7860 Email: customer.service@cecilware.com




Countertop Display Refrigerators


Models & Dimensions



CTR2.68LD Refrigerator with Illuminated Header

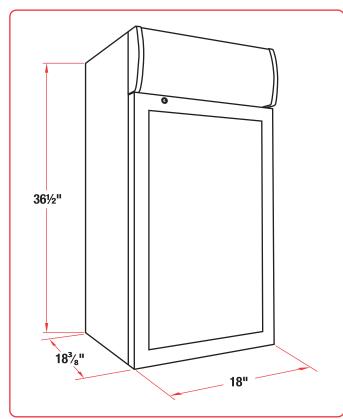

CTR3.75 Five Shelf Refrigerator

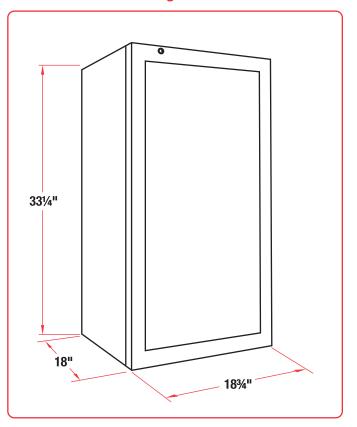

Options

Additional Shelves For CTR2.68LD Part # 08725 Additional Shelves For CTR3.75 Part # 08727 Custom display graphics are available for CTR2.68LD at an additional charge, please contact Cecilware marketing for more information.

NEMA 5-15R

Specifications							
Model	Cubic Ft.	Shelves	Temp.	HP	Dimensions W x D x H	Electrical	Ship Weight
CTR2.68LD	2.7	4	34°F - 45°F	1⁄8	18" x 18%" x 36½"	120V, .09KW, 1.8A	90 lbs.
CTR3.75	3.8	5	34°F - 45°F	1⁄8	18¾" x 18" x 33¼"	120V, .09KW, 2A	85 lbs.

Electrical: Cord & plug set included, Nema plug 5-15P. Refrigerant: R-134a. Finish: Black.

Specifications subject to change without notice.

Cecilware Corporation 43-05 20th. Avenue, LIC NY 11105 Tel: 800.935.2211 / 718.932.1414 • Fax: 718.932.7860 Email: customer.service@cecilware.com



www.cecilware.com