



KRATOS EQUIPMENT
 7750 Georgetown Road, Indianapolis, IN 46268
 Sales: (317) 634-2550
 Tech Service: (887) 368-2797

Project Name: _____
 Location: _____
 Item #: _____ Qty: _____
 Model: _____

GLASS DOOR MERCHANDISER | 72 Cu Ft FREEZERS

Model: 69K-827 (White) 69K-813 (Black)



69K-827



69K-813
(Color: Black)

Glass door merchandisers are designed for durability and visual appeal in promoting your product. Glass door merchandisers are energy efficient and effective at keeping product at exactly the right temperature to preserve freshness, prolong shelf life and prevent freezer burn. Simple-to-use, programmable solid-state digital controls deliver accurate temperature regulation. An oversized refrigeration system provides energy efficiency, rapid recovery and consistent minimal change in the internal environment even if the door is opened frequently.

FEATURES

- Hinged Door Models: Self-closing, magnetic gasket
- Triple pane heated glass glass doors enhance energy efficiency by inhibiting heat loss and minimizing condensation
- Interior LED lighting
- Bottom mounted oversized compressor
- Twelve (12) heavy-duty, PE (polyethylene) coated wire shelves
- Pre-programmed automatic defrost cycle for ideal, trouble-free storage conditions
- Temperature reading visible from up to 15 feet away
- Door lock for security
- Four (4) rollers (2 with levelling feet – swivel casters are an available option)

TEMPERATURE

- Holding temperature: -10°F to 10°F (-23° to -12°C)
- Comes factory set to -4°F (-20°C)
- Digitally controlled system maintains optimum temperature
- Oversized refrigeration system provides rapid temperature recovery

CONSTRUCTION

- Exterior Material: Powder coated steel.
- Interior Material: Powder coated aluminium. Easy to clean, low maintenance.
- Integral condensate evaporator so there is no need for a floor drain
- Illuminated merchandising panel to promote product(s)

REFRIGERANT
 CFC & HCFC free R-404A



NEMA L14-20

ELECTRIC
 208-230/60Hz/1 Ph 4 wire (NEMA L14-20)
 * Requires a current protected, designated circuit



Certified to ANSI-NSF 7



Certified to ANSI UL 471



Environmentally Friendly



Exceeds today's energy consumption standards

KRATOS WARRANTY (USA / CANADA)

One (1) year parts
 One (1) year on-site labor
 Four (4) additional years (Five (5) total) for the compressor (part only)
 Administered by KRATOS EQUIPMENT, 887.368.2797
 24/7 tech support provided

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.


The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each KRATOS will deliver years of trouble free, reliable, low maintenance, efficient operation.




KRATOS EQUIPMENT
 7750 Georgetown Road, Indianapolis, IN 46268
 Sales: (317) 634-2550
 Tech Service: (887) 368-2797

Project Name: _____
 Location: _____
 Item #: _____ Qty: _____
 Model: _____

GLASS DOOR MERCHANDISER | 72 Cu Ft FREEZERS

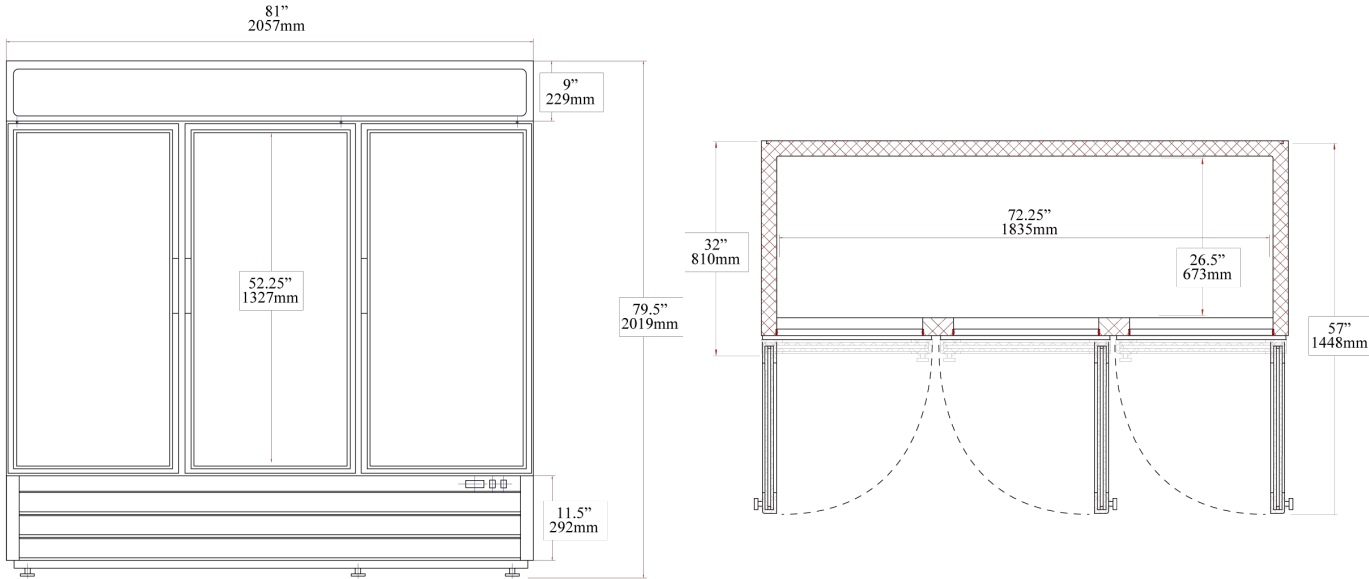

Backlit Display Panel



	69K-827 / 69K-813
In: External Dimensions W x D x H	81 x 32 x 79.5
mm: External Dimensions W x D x H	2057 x 810 x 2019
In: Internal Dimensions W x D x H	76.5 x 26.5 x 52.375
mm: Internal Dimensions W x D x H	1943 x 673 x 1330
Nominal Capacity	72 Cu Ft / 2039 L
Shelves	(12) shelves. (4) per door.
Maxx Amp Draw	12 Amps
Unit Weight	618 lb / 280 kg
Shipping Weight	670 lb / 305 kg

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.