


INSTRUCTIONS TO ASSEMBLE THE DEXTER®/RUSSELL® 3-WAY KNIFE SHARPENER™

- 1** Insert one end of brass rod through hole located in center of end piece (A). Thread bolt screw through recessed hole in end piece (A) into brass rod and tighten until top of bolt is below flat surface of end piece.
- 2** Lay end piece (A) flat on counter top with end holes and brass rod facing upward in a vertical position.
- 3** Place each ceramic rod in large holes of end piece (A).
- 4** End piece (B) is then placed on top of ceramic rods and brass rod, pressed down into position, and held prior to applying second bolt screw.
- 5** Take second bolt screw, place through hole of end piece (B), and screw into brass rod until bolt head is below flat surface of end piece. Do not overtighten.
- 6** Place the DEXTER®/RUSSELL® 3-WAY KNIFE SHARPENER™ firmly on a level surface. Adjust tension of brass rod so base does not rock.
- 7** Remove self adhesive rubber feet from backing and apply to sides of end pieces as illustrated. The rubber feet will prevent sliding when both end pieces of sharpener are flat on surface.
- 8** You are now ready to commence sharpening. See reverse side for instructions.

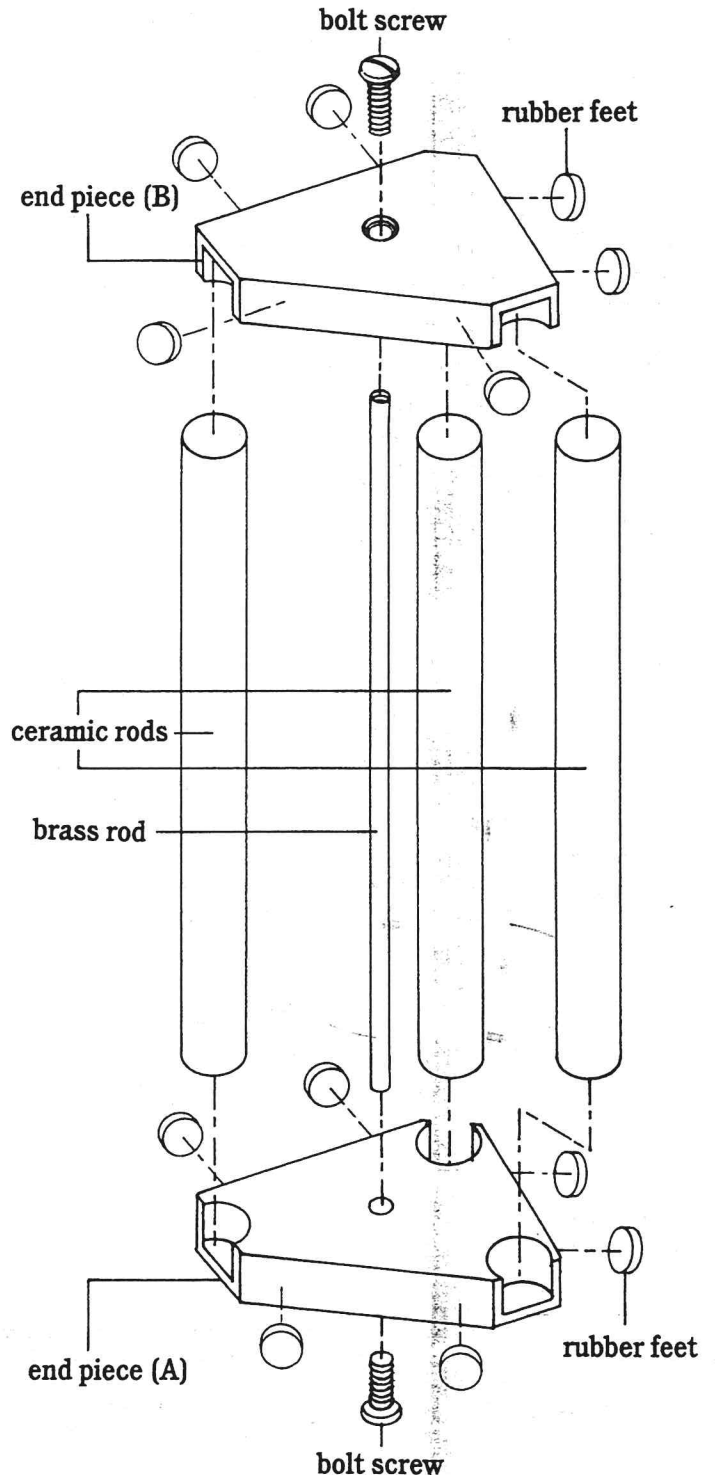

DEXTER
THE EDGE SINCE 1818

44 River Street · Southbridge, MA 01550 U.S.A.
Tel. (508) 765-0201 · Fax: (508) 764-2897
www.dexter1818.com
email: sales@dexter1818.com