

HUBERT Slant Wire Cart


PACKAGE CONTENTS:

| PART# | DESCRIPTION | QTY.(PCS) |
|-------|----------------------|-----------|
| 1 | Shelf | 4 |
| 2 | Clips | 32 |
| 3 | Caster with Brake | 2 |
| 4 | Caster without Brake | 2 |
| 5 | Upper Post | 4 |
| 6 | Lower Post | 4 |

STEP 1: CASTER INSTALLTION

1. Identify the 4 lower posts that have one threaded end and one smooth end (versus the upper posts that will have a black end cap on one end and threading on the other end). Casters should be installed on the smooth end
2. Lay out a piece or two of cardboard on the floor for protection of the floor and the post.
3. Hold the post so the threaded end is toward the floor.
4. Hold caster with the stem facing the post and the wheel toward the ceiling.
5. Line the closed back of the open split ring (on the stem of the caster) inside the pole.
6. Stabilize the caster with one hand and the post with the other hand, trying the line them up as much as possible with the ring inside.
7. Gently tap the post on the card board until stem is completely inside the pole.


STEP1 See specific steps for caster installation above

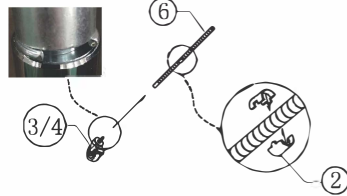

STEP2




STEP3

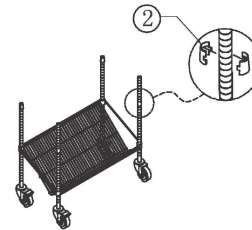


STEP4




STEP5




STEP6





STEP7

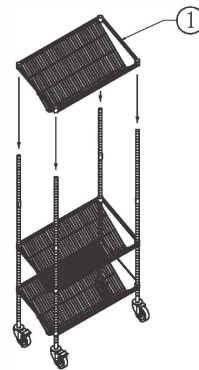

STEP8



STEP9

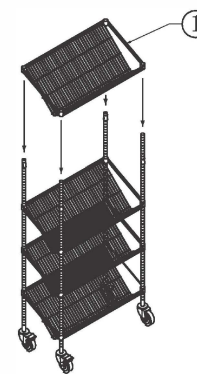

Final Assembly

Helpful Hints when assembling the cart:

- Make sure the arrows on the black clips are pointing up
- After closing clips together, adjust up or down until they lock into place. This will prevent the clips from moving while installing shelves
- Use a rubber mallet to lock shelves in place, or to remove shelves to adjust up or down
- For every shelf, there is 8 section of post between front and back shelf

HUBERT[®]
Worldwide Excellence in Food Merchandising

9555 Dry Fork Rd., Harrison, OH 45030-1994 . 1-800-543-7374

www.hubert.com