# HUBERT®

| Project           |  |
|-------------------|--|
| Item              |  |
| Quantity          |  |
| ,                 |  |
| CSI Section 11400 |  |
| Approval          |  |
| Date              |  |

# **Hubert HT-E**



#### **Standard Features**

- Automatic fill
- Push button start
- Built-in booster heater with Sani-Sure™ feature ensures proper sanitation
- · Labyrinth type door design
- Automatic pumped drain for floor and wall drain installations
- Stainless steel wash pump
- Universal timer
- Digital LED control panel
- Delime cycle
- Simplified controls allow easy access for operation and service
- · Door switch
- One (1) each peg and combination rack included
- Built-in chemical pumps and priming switches

## **Mandatory Specs**

Specify voltage

### **Options**

- ☐ 1/2" Pressure Regulator
- ☐ Water Hammer Arrestor
- ☐ Back Panel
- ☐ Drain Quench System
- ☐ Scale Prevention System (SPS)
- Replacement Cartridge for SPS
- ☐ Tie Down

#### **Accessories**

- ☐ 36-Compartment Rack
  - 4-1/8" tall (105 mm)
  - ☐ 5-5/8" tall (143 mm) ☐ 7" tall (178 mm)
- ☐ Combination Rack
- ☐ Peg Rack
- ☐ Machine Stand
  - ☐ 6" (152 mm) high
  - ☐ 18" (457 mm) high

# **Specifications**

Uses 0.65 gallons (2.47 liters) of water per rack

Uses 17.55 gallons (66.44 liters) of water per hour

Cleans 27 racks per hour

Three selectable cycles: Normal - 100 seconds Heavy - 168 seconds Extra-Heavy - 268 seconds

Powerful 1 hp wash pump motor

Air insulated between body and stainless steel housing

Durable stainless steel construction

#### Notes:

A vent hood is not recommended above the Hubert HT-E as it does not produce excessive vapors. Always check with the local building code to know what type of ventilation is required for commercial dish machine installations in your area.

Normal operation of the Hubert HT-E generates steam that may escape from the door. Materials such as wood laminate, veneers, etc. are unsuitable for use in areas exposed to dishwasher steam and detergents. Stainless steel or other moisture-resistant shields are recommended for surfaces adjacent to Hubert HT-E sides and top.




ntertek



Intertek



# HUBERT®

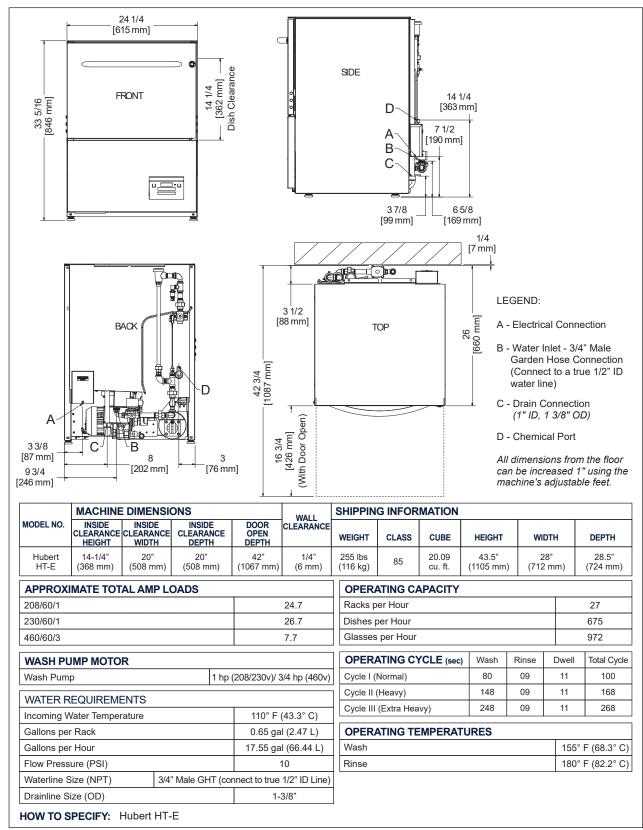

#### **Hubert Company LLC**

Address: 9555 Dry Fork Road Harrison, OH 45030

Telephone: (800) 543-7374 Website: www.hubert.com HUB-0001 [10/16/17]