

COMMERCIAL

Chest Freezer Solid Top Freezer, 14 cu.ft , 1 Basket



ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

Main Features

- Temperature range of -15 to +10 F°
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.
- Low energy consumption
- Mechanical control panel with adjustable temperature
- Included as standard 1 NSF® certified temperature gauge and 1 NSF® certified basket (including one vertical divider) durable and reliable for safety in food storage
- Removable rubber bumper guards
- Bottom drain with plug for easy interior cleaning and defrost water discharge.

Construction

- Foamed lid for best insulation and product robustness
- Soft closing lid mechanism
- Static condenser
- Exterior and Interior finish in white painted steel
- · Locking lids and key protect the contents of the unit
- Mounted on heavy-duty casters, two locking to keep unit in place but allows position adjusting.


APPROVAL:




Chest Freezer Solid Top Freezer, 14 cu.ft , 1 Basket

ont _.	Electric	
Ţ	Supply voltage: 738230 (KCCF140WH) Electrical power, max: Plug type:	115 V/1 ph/60 Hz 0.2 kW USA NEMA 5-15P
ε	Capacity:	
853, 5 mm	Gross capacity:	14.2 cu.feet
85.	Key Information:	
ide	External dimensions, Width: External dimensions, Depth: External dimensions, Height: Condenser type: Automatic Defrost Cooling System: Compressor Horsepower: Freezer baskets (Number/Type): Control Warranty	51 3/4" (1313.8 mm) 29 5/16" (744.22 mm) 36 " (914.4 mm) Static No 1/5 1 / Wire Mechanical 1/5 Years
	Net weight: Shipping width: Shipping height: Shipping weight: Shipping volume:	150 lbs (68 kg) 30 1/2" (775 mm) 40 9/16" (1030 mm) 160 lbs (72.72 kg) 39.1 ft ³ (1.11 m ³)
	Refrigeration Data	
	Temperature display location: Temperature range: Refrigerant type:	Internal -15 to 10 °F R290

51 3/4" |3|4.4 mm Г 25 m 33 6/10' 3 1/6° 80,5mm 0 O 80. Π G Si 29 3/10" 743



EI = Electrical connection

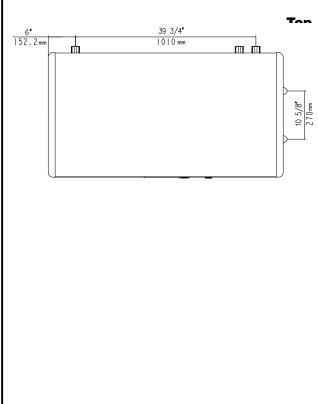

Chest Freezer Solid Top Freezer, 14 cu.ft , 1 Basket



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.