


Assembly Instructions | 116-075-Series (Light-Duty Spinner Rack)

PARTS LIST

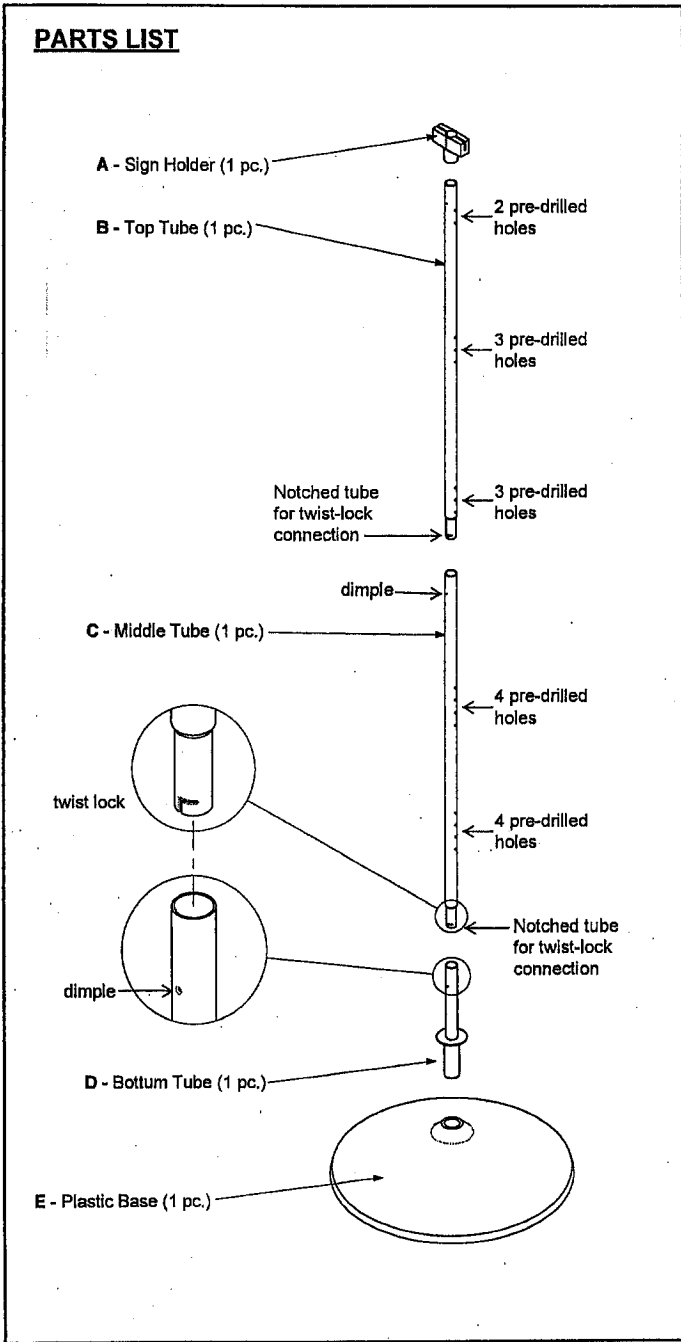

DIRECTIONS

1. Insert the Bottom Tube (D) into the Plastic Base (E), as shown in the Parts List diagram at left.
2. Insert the swaged (narrow) end of the Middle Tube (C) into the top of the Bottom Tube (D), making sure to align the twist-lock with the dimple (see detail at left). After Middle Tube is fully inserted, twist the Middle Tube clockwise until it locks in place within the Bottom Tube.
3. Insert the Top Tube (B) into Middle Tube (C) using the same twist-lock procedure above.
4. Install the tiers in the locations dictated by the product size. Use cotter pins to support tiers at any pre-drilled hole on the tubes. See below for more details and an example of a typical tier placement.
Please Note: Your display may have a different style or a different number of tiers. Also, some displays are shipped with thumbscrew support clamps instead of cotter pins.
5. Put the Sign Holder (A) on the top of the display.
6. Install your sign header card into the slot on the Sign Holder (A).

