

TACH-IT®

LOADING INSTRUCTIONS FOR TACH-IT BAG SEALER MODEL #'S E-3, E-7R, E-7RSS, E-9

PLEASE NOTE THAT THESE MACHINES LOOK SLIGHTLY DIFFERENT, BUT THE LOADING IS THE SAME FOR ALL OF THE ABOVE MODELS.

- 1) Put the roll of tape onto the Tape Mandrel located onto at the back of the machine so that the tape is coming off the Tape Mandrel from the bottom and the adhesive side is facing up. If the tape is installed properly, the tape roll will spin in a clockwise direction as the tape is pulled. (on models E-3, E-7R, and E-7RSS the Tape Mandrel must be removed from the machine, on the E-9, the Tape mandrel is affixed to the machine).
- 2) Pull the tape so that it extends past the Bag Opening by about 1". See Figure 1.
- 3) Take the neck of the bag and twist it. See Figure 2.
- 4) Take the bag and push it into and down the Bag Opening. See Figure 3.
- 5) After the bag is sealed, pull it out on the side and seal the next bag. If using the E-7R and E-7RSS these machines are equipped with an optional bag trimmer. To use this, after sealing the bag, but before removing it, push the bag into the bag trimmer and the excess bag will be cut.
- 6) The machine is now ready for the next closure.
- 7) To replace a roll of tape follow the instructions below.

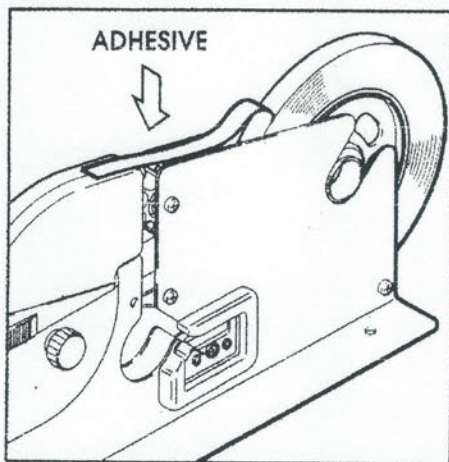


FIGURE 1



FIGURE 2

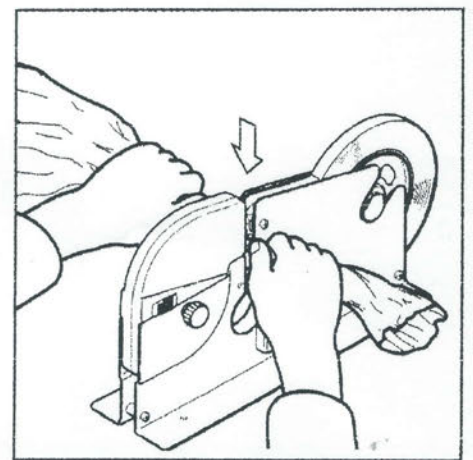


FIGURE 3

Ben Clements and Sons, Inc. / Clements Industries, Inc.
50 Ruta Court, South Hackensack, New Jersey 07606 USA. 201-440-5500, 1-800-222-5540, fax 201-440-1455

Tach-It (UK) England, Clements Industries Japan, Clements Industries Inc. Korea
Tach-It and Twisters are registered, copyrighted or trademarks of Clements Industries, Inc.

© Ben Clements & Sons, Inc. and Clements Industries, Inc. 1999

Printed in USA