


# TILTING FLOOR STAND ASSEMBLY INSTRUCTIONS

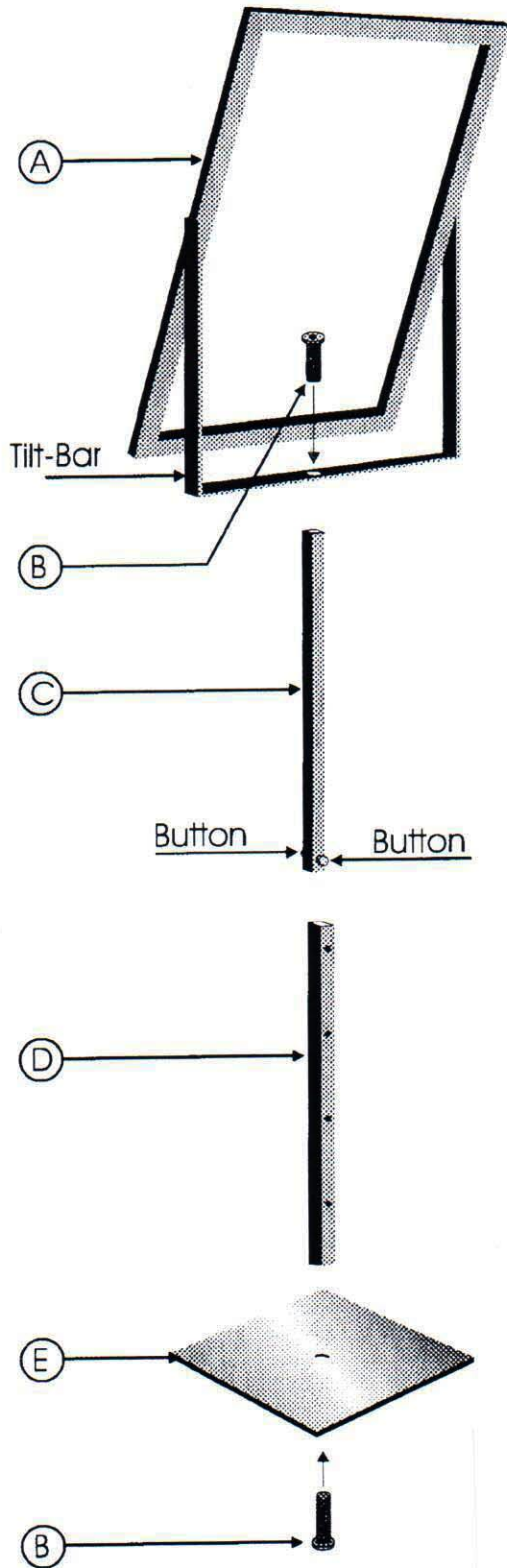

## Contents:

- (A) Tilting Sign Holder: (1)
- (B) Allen Head Bolt: (2)
- (C) Top Tube: (1)
- (D) Bottom Tube: (1)
- (E) Flat Base: (1)

## Tools Required:

Allen Head Wrench (included)

- 1) Attach the bottom tube (D) to the flat base (E) with one allen head bolt (B). Be sure the tapered countersunk hole on the flat surface base is on the bottom. When completed, stand this portion on the floor.
- 2) Lay the tilting sign holder (A) on a flat surface. Raise the tilt bar and attach the top tube (C) to the tilting sign holder (A) with one allen head bolt.
- 3) Insert the top tube (C) into the bottom tube (D). Be sure the buttons on the top tube are lined up with the holes on the bottom tube.
- 4) Squeeze the buttons on the top tube (C) and raise or lower the tilting sign holder to your desired height. Be sure both buttons are fully extended out of the holes on the bottom tube (D) for proper seating.