

The Shortening Shuttle®

Single & Double Wheel Kits (part # SS-SWK00 & SS-DWK00)

for all series SS-611 & series SS-709 Shortening Shuttles®

Installation



CAUTION: Read these instructions carefully before
using to insure safe operation.

Shortening Shuttle® Wheel Kits

Parts List for SS-SWK (Single Wheel Kit):

1 pc	8" Wheel
1 pc	Wheel Bolt
2 pc	WIP-WBWA, Wheel Bolt Washers
1 pc	3/8" Flange Nut

Parts List for SS-DWK (Double Wheel Kit):

2 pc	8" Wheels
2 pc	Wheel Bolts
2 pc	WIP-WBWA, Wheel Bolt Washers
2 pc	3/8" Flange Nuts

Installation

It is very important that the wheels of the ***Shortening Shuttle®*** be working properly and installed properly for safe operation of the ***Shortening Shuttle®***.

Begin by removing the locknut and lockwasher from the old wheel bolt. Then gently tap the end of the old wheel bolt to push it out of the wheel bracket. Now you can remove the old wheel and wheel bolt from the ***Shortening Shuttle®***.


CAUTIONS

Never use the ***Shortening Shuttle®*** without the baffle screen in place. The baffle screen prevents hot shortening from splashing out of the ***Shortening Shuttle®*** due to excessive jostling and/or the accidental dropping of the unit while containing liquids.


Remove the locknut and lockwasher from the new wheel assembly, being careful not to remove the wheel bolt or the wheel bolt washers from the wheel. If they do become separated then follow illustration 'A' to reunite them into the proper orientation. Carefully insert the new wheel bolt and wheel into the square hole. Install the lockwasher and locknut finger tight. Then use a wrench to securely tighten the locknut and securely seat the wheel bolt into the square hole in the wheel bracket.

This successfully completes the installation of one Wheel Kit. If you ordered a Double Wheel Kit then you must repeat the above instructions for the second Wheel.

Installation is now complete. There is a spare parts list on the back page of this pamphlet so that you may keep your *Shortening Shuttle*® in proper working order.

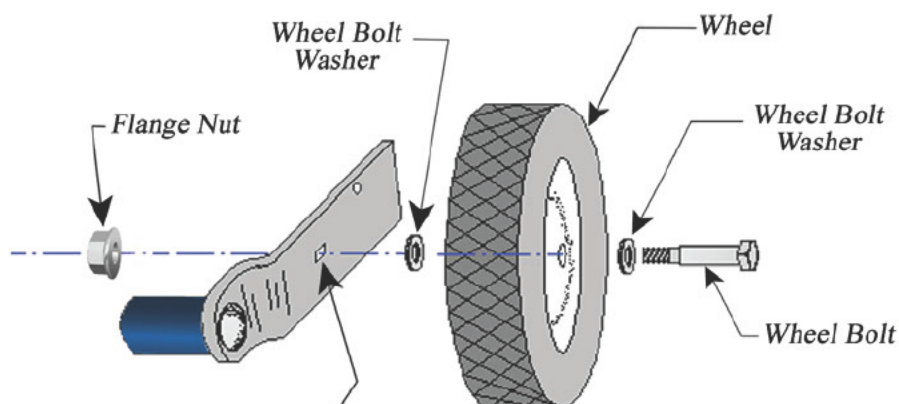

Note: If your Shortening Shuttle does not have a square hole for the wheel bolt then you must request a wheel bolt adapter.

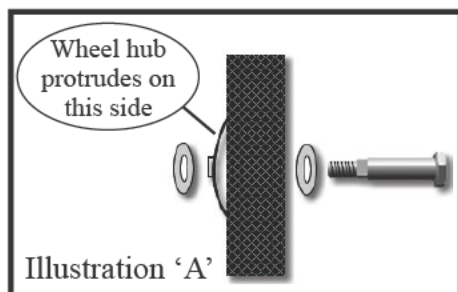

CAUTIONS

Never pour any caustic cleaning solutions inside or on the outside of the *Shortening Shuttle*®. This action can cause damage to the unit's structural integrity.

Spare Parts

All of the removable parts on the *Shortening Shuttle*® are available from us. When you need replacement parts call us and order genuine *Shortening Shuttle*® parts.

Spare Part #s By Model

<u>Description</u>	<u>SS-611</u>	<u>SS-611-T</u>	<u>SS-611-TL</u>	<u>SS-709</u>
Single Wheel Kit	SS-SWK	SS-SWK	SS-SWK	SS-SWK
Double Wheel Kit	SS-DWK	SS-DWK	SS-DWK	SS-DWK
Wheel Handle Kit	SS611WHK	SS611WHK	SS611WHK	SS611WHK
Wheel Handle Brkts	SS611WHB	SS611-TWHB	SS611-TLWHB	SS709WHB
Top Handle Kit	SS611THK	SS611THK	SS611THK	SS709THK
Baffle Screen Assm.	SS611BSA	SS611BSA	SS611-TLBSA	SS709BSA
Safety Labels Kit	SS-HOT-LB	SS-HOT-LB	SS-HOT-LB	SS-HOT-LB

Accessories

Dumpster Extension	SS-611-DX	SS-611-DX	SS-611-DX	SS-709-DX
Splash Guard	SS-611-SG	SS-611-SG	SS-611-SG	SS-709-SPG
Shuttle Cover	SS-611-COV	SS-611-COV	SS-611-COV	SS-709-COV
Drop-In Shuttle Filter	SS-SF-100	SS-SF-100	SS-SF-100	SS-SF-100
Shuttle Funnel	SS-FUN-100	SS-FUN-100	SS-FUN-100	N/A
Fryer Drain Hose			FDH-075NPT	
Fryer Drain Hose			FDH-100NPT	
Fryer Drain Hose			FDH-125NPT	
Drain Pipe			WIP-DPIP-125NPT	
Safety Gloves, heat resistant			914-207	

