



Project:

Item Number:

Quantity:

## CAYENNE® HEAVY-DUTY FLAT TOP GAS GRIDDLES



924GGM



924GGT

Cayenne® Heavy-Duty Gas Flat Top Griddles

### DESCRIPTION

Vollrath's Cayenne® heavy-duty gas flat top gas griddles provide a simple and effective way to prepare high volumes of food in an economical, safe and hassle-free way. These griddles are ideally suited for use in steak houses, restaurants, coffee shops, clubs and pubs.

### CLEARANCE AND POSITIONING

This appliance must be installed with a minimum clearance of 6" (15.2 cm) between the left, right and back sides, and any combustible surface. The supplied 4" (10.2 cm) legs must be installed and the unit placed on a non-combustible surface.

### Agency Listings



Due to continued product improvement, please consult [www.vollrathco.com](http://www.vollrathco.com) for current product specifications.

### MODELS

#### Manually Controlled Griddles

924GGM	FTG2024	24" Gas Griddle, 60,000 BTU
936GGM	FTG2026	36" Gas Griddle, 90,000 BTU
948GGM	FTG2048	48" Gas Griddle, 120,000 BTU
960GGM	FTG2060	60" Gas Griddle, 150,000 BTU
972GGM	FTG2072	72" Gas Griddle, 180,000 BTU

#### Thermostatically Controlled Griddles

924GGT	FTT2024	24" Gas Griddle, 60,000 BTU
936GGT	FTT2036	36" Gas Griddle, 90,000 BTU
948GGT	FTT2048	48" Gas Griddle, 120,000 BTU
960GGT	FTT2060	60" Gas Griddle, 150,000 BTU
972GGT	FTT2072	72" Gas Griddle, 180,000 BTU

### FEATURES

- Custom stainless steel, U-shaped 30,000 BTU burners
- Burners placed every 12" (30.5 cm) for 30,000 BTU per 12" of cooking surface
- All stainless steel exterior
- Shipped set up for natural gas, includes kit for conversion to propane
- Includes regulator and gas valve
- Polished 1" (2.5 cm) thick, welded steel griddle plate for even heat distribution and retention, and eliminates grease and dirt traps
- Grease trays are sized to fit into a commercial dishwasher for easier cleaning
- Heavy-duty adjustable legs
- Heavy-duty 3mm thick back and side splashes contain splash and keep food on the unit
- All metal knobs and knob guards protect gas valves from damage and won't break or crack and are **GUARANTEED FOR LIFE**
- ¾" NPT gas inlet
- Thermostatically controlled griddles maintain user settings to ensure consistent surface temperature

**WARRANTY:** All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to the Vollrath Equipment and Smallwares Catalog.

Approvals	Date



[www.vollrathco.com](http://www.vollrathco.com)

The Vollrath Company, L.L.C.  
1236 North 18th Street  
Sheboygan, WI 53081-3201 U.S.A.  
Customer Service: 800.628.0830  
Canada Customer Service: 800.695.8560  
Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832  
Technical Services Fax: 920.459.5462


# CAYENNE® HEAVY-DUTY FLAT TOP GAS GRIDDLES

## MODELS

924GGM	FTG2024	24" Gas Griddle, Manually Controlled	924GGT	FTT2024	24" Gas Griddle, Thermostatically Controlled
936GGM	FTG2026	36" Gas Griddle, Manually Controlled	936GGT	FTT2026	36" Gas Griddle, Thermostatically Controlled
948GGM	FTG2048	48" Gas Griddle, Manually Controlled	948GGT	FTT2048	48" Gas Griddle, Thermostatically Controlled
960GGM	FTG2060	60" Gas Griddle, Manually Controlled	960GGT	FTT2060	60" Gas Griddle, Thermostatically Controlled
972GGM	FTG2072	72" Gas Griddle, Manually Controlled	972GGT	FTT2072	72" Gas Griddle, Thermostatically Controlled

## DIMENSIONS

□ Dimensions shown in inches (cm).

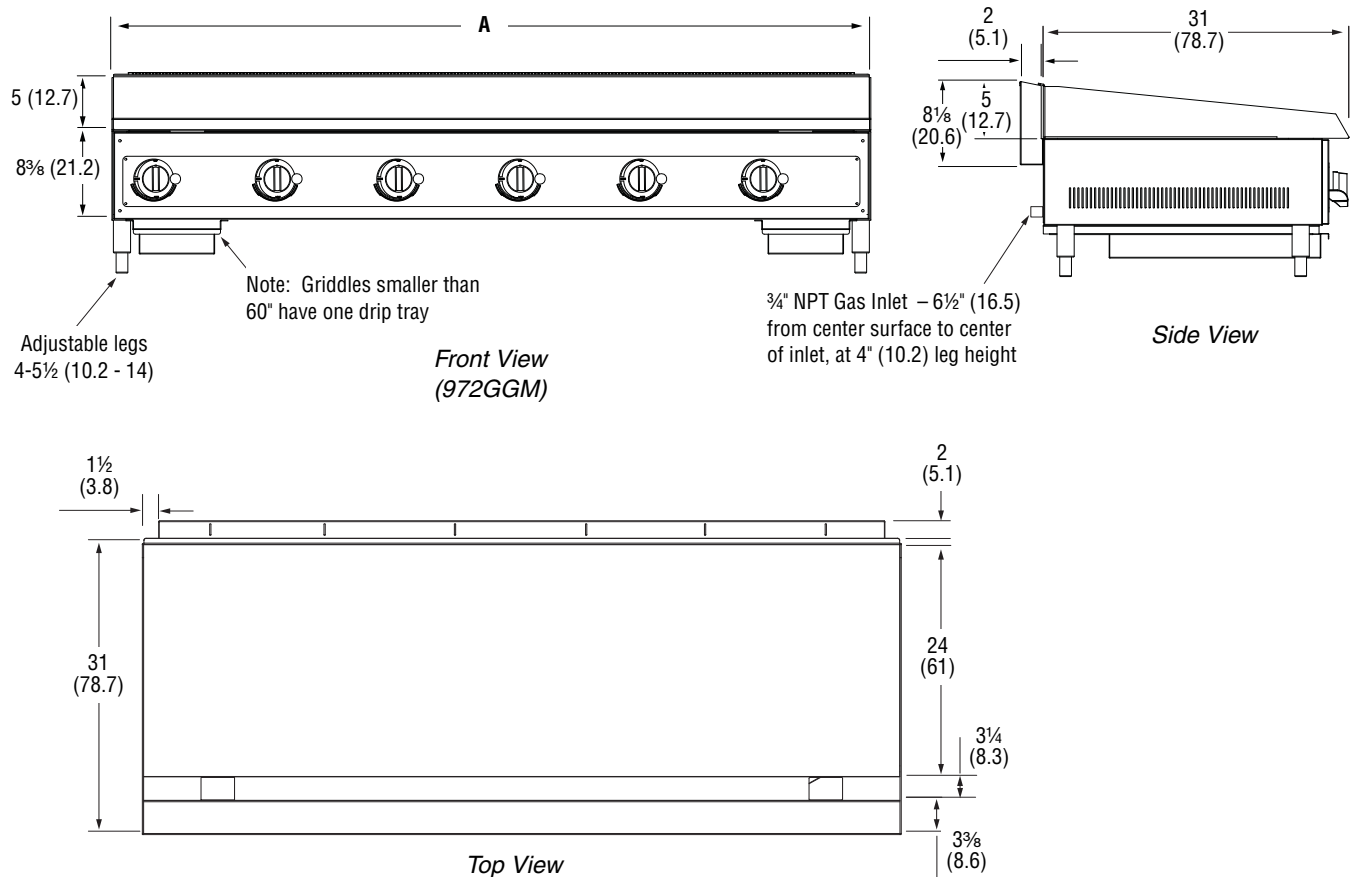

## SPECIFICATIONS

Item No.		(A) Width	Output (BTU)	Number of Burners	Pilot Type	Number of Drip Trays
Manual Control	Thermostatic Control					
924GGM	924GGT	24 (61.0)	60,000	2	Standing	1
936GGM	936GGT	36 (91.4)	90,000	3	Standing	1
948GGM	948GGT	48 (121.9)	120,000	4	Standing	1
960GGM	960GGT	60 (152.4)	150,000	5	Standing	2
972GGM	972GGT	72 (182.9)	180,000	6	Standing	2



The Vollrath Company, L.L.C.  
 1236 North 18th Street  
 Sheboygan, WI 53081-3201 U.S.A.  
 Customer Service: 800.628.0830  
 Canada Customer Service: 800.695.8560  
 Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832  
 Technical Services Fax: 920.459.5462