

# Enclosed Tray Trucks

## Premier Series™ - Stainless Steel

### Designed For Delivery Of Insulated Meal Trays.



Model 6920

- Accommodates 10 or 20 each, 14" x 18" or 15" x 20" size trays, one per ledge.
- Doors open 270° for unobstructed access.
- Sure-grip door catch assures positive door closure and convenient one-hand opening.
- Recessed vertical push handles on both ends.
- Cart body and removable stainless steel ledge panels are easily cleaned and sanitized.
- Perimeter bumper protect walls, furnishings and doors.
- Compartment floor drain facilitates interior cleaning.
- Space saving narrow design.

### Specifications

Unit shall be of Type 304 stainless steel welded and riveted construction to accommodate 14" x 18" (356 x 457 mm) or 15" x 20" (381 x 508 mm) trays. Material thickness shall be 16 gauge for top and floor/base, 18 gauge for back and sides. Door(s) shall be of 18 gauge insulated double-pan design, and shall be mounted to unit frame with three each 3" (76 mm) heavy-duty stainless steel hinges. Hinges shall be welded to door(s) and unit frame. Door(s) shall swing 270° to provide full access to tray compartments, and shall be easily removable by lifting off of hinges. Doors shall be held in full open position by hold-open catches. Door latches shall be recessed paddle design. Tray ledges shall be of 16 gauge stainless steel angle, welded to a 14 gauge stainless frame panel at 5" (127 mm) spacing. Ledge panels shall be adjustable to accommodate 14" x 18" or 15" x 20" trays, and shall be removable for easy cleaning. Tray compartment(s) shall have vents on sides and back panels and shall have perforated floor center drain(s). Unit shall feature 1/2" (13 mm) thick extruded PVC perimeter bumper mounted to unit base, and recessed rubber coated vertical push handles on both ends of unit. Casters shall be extra-load plate type, mounted to 12 gauge stainless steel channels on unit base. Casters shall feature shielded swivel ball bearing races and zerk fittings for lubrication of swivel and hub bearings. Caster wheels shall be 6" (152 mm) diameter with 2" wide rounded tread of non-marking cushion material. Two casters shall have brake. Unit shall be NSF listed.



### Optional Accessories

- Custom Ledge Spacing



Lakeside Manufacturing, Inc.


4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.  
800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com

# Enclosed Tray Trucks

## Premier Series™ - Stainless Steel

AIA #

Spec. #

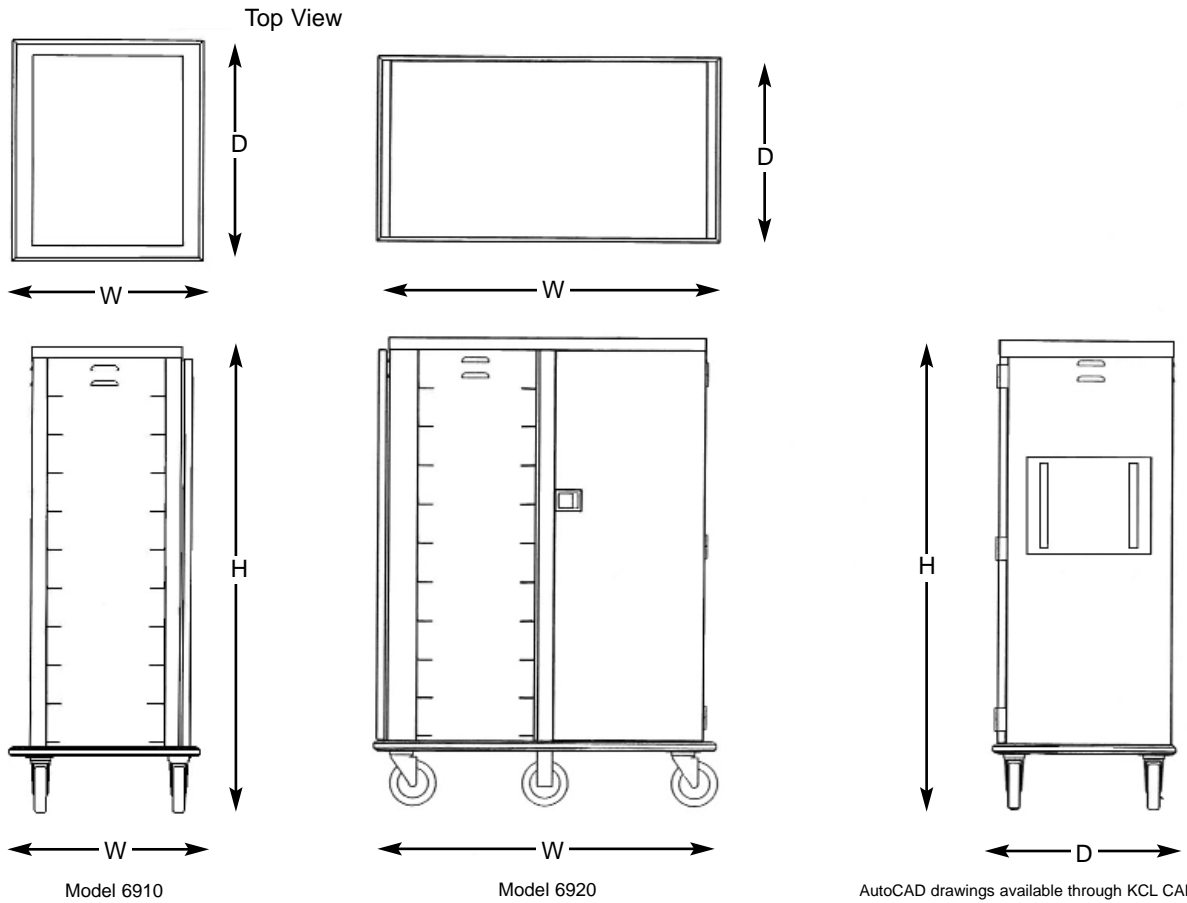

AutoCAD drawings available through KCL CADalog

### Dimensions

| Model | Tray Capacity*   | Ledge Spacing | # of Interior Compartments | Overall Sizes     |                  |                   | Lake-Glide® Casters  |             | Case Weight |        |
|-------|--|---------------|----------------------------|-------------------|------------------|-------------------|----------------------|-------------|-------------|--------|
|       |  |               |                            | W                 | D                | H                 | Type                 | Dia.        | Lbs.        | (Kg)   |
| 6910  | 10 ea.<br>14" x 18" or 15" x 20"<br>(356 x 457) or (381 x 508) | 5"<br>(127)   | 1                          | 32-3/4"<br>(832)  | 23-3/4"<br>(603) | 60-3/4"<br>(1543) | 4 - All swivel       | 6"<br>(152) | 125         | (56.7) |
| 6920  | 20 ea.<br>14" x 18" or 15" x 20"<br>(356 x 457) or (381 x 508) | 5"<br>(127)   | 2                          | 44-3/4"<br>(1137) | 23-3/4"<br>(603) | 60-3/4"<br>(1543) | 4 swivel,<br>2 fixed | 6"<br>(152) | 225         | 102    |

\*One tray per ledge  
Measurements in ( ) denote metric millimeters, unless otherwise specified.



Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.  
800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com