

# Mobile Self-Leveling Cabinets

For Oval Dishes - Stainless Steel



Model V5210

**Dispensing level is easily adjusted by attaching or detaching springs. No tools required.**

- Models available to fit oval plates from 9¾ long" to 14½ long".
- All models have a 25" stacking capacity.
- Easy-Glide™ design provides quiet, non-stick operation.
- Heated models feature thermostatic control. Thermostat minimum 100°F (38°C), maximum 175°F (79°C).
- 4" Lake-Glide® casters - all swivel, 2 with brake, extra-load.

## Specifications

**Mobile Cabinet:** Mobile cabinets shall be of all-welded stainless steel construction. Cabinets shall have 18-gauge top and 20-gauge sides and bottom and shall include bottom corner bumpers. Cabinet bottom shall have center clean out hole. Casters shall be 4" (102 mm) diameter extra-load swivel (two with locking brake). Unit shall feature a heavy-duty independent undercarriage frame of galvanized steel to which casters shall be mounted. Units shall be NSF listed.

**Dispenser Tubes:** Dispenser tubes shall be of welded stainless steel construction and shall drop into mobile cabinet top openings. Dispensers shall hang from cabinet opening by an 14-gauge flange rim, and feature four each 18-gauge vertical side supports welded to 18-gauge bottom plate. Self-leveling dish carriage shall be of welded stainless steel construction and shall travel vertically in dispenser tube with nylon guides for smooth operation. Carriage shall have a 20-gauge removable dish platform. Dispensers shall feature flange mounted extension springs on two sides, which are detachable from the dish carriage, to provide adjustment without tools for different weight dishes. Each dispenser shall have a vertical stacking capacity of 25" (635 mm).

**Heated Models Only:** Unit shall be 120 VAC 60 Hz and shall have 6' (1829 mm) coiled power supply cord with 5-15P NEMA plug for 120 VAC. Cabinet shall have interior mounted electrical junction box with twist-lock receptacles for individual power to each dispenser. Dispenser tubes shall be fully enclosed in 22-gauge stainless steel, and have a circular bottom mounted 450 watt heater element to provide convection heat. Heating system shall feature thermostatic control in a tamper protective location with safe high-end shut off. Control shall have infinite settings between low and high temperature cut-outs. Thermostat shall be field adjustable for average interior air temperature between 100° F (38° C) and 175° F (79° C) at middle adjustable thermostatic setting. On-off switch and power indicator light shall be mounted on top flange of each dispenser. Average dish temperature rise of 40° F (22° C) above ambient shall be achieved within one hour of initial heating cycle at middle adjustable thermostatic setting. Cabinet and dispenser tubes shall be UL listed.




**LAKESIDE**  
Ingenuity On Wheels™

Lakeside Manufacturing, Inc.  
4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.  
800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com

# Mobile Self-Leveling Cabinets

For Oval Dishes - Stainless Steel

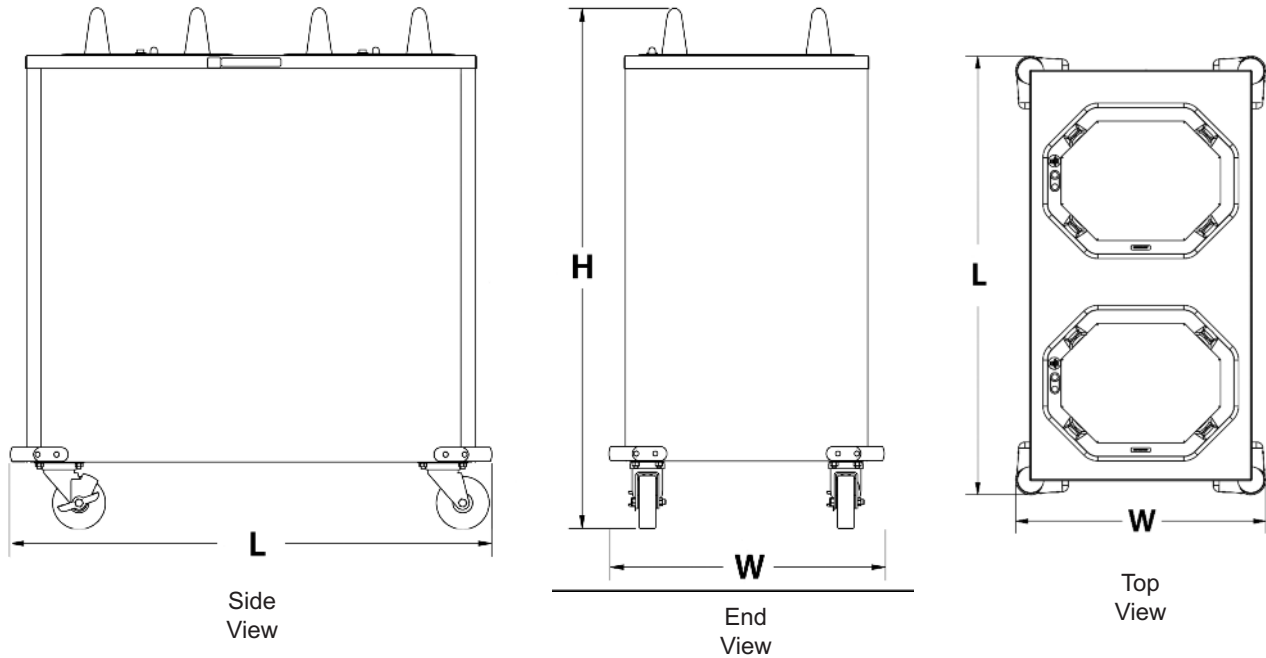

AutoCAD drawings available through KCL CADalog

## Dimensions

### Two Stack Models

Unheated		Heated		Accommodates Oval Plate Size	Dimensions		
Model	Ship Wt.	Model	Ship Wt.		W	L	H
<b>V5210</b>	101 (45.8)	<b>V6210</b>	128 (58.0)	6 <sup>3</sup> / <sub>4</sub> " x 9 <sup>3</sup> / <sub>4</sub> " to 7 <sup>3</sup> / <sub>4</sub> " x 10 <sup>1</sup> / <sub>2</sub> "	20 <sup>3</sup> / <sub>4</sub> (527)	36 <sup>1</sup> / <sub>2</sub> " 927	40" 1013)
<b>V5211</b>	103 (46.7)	<b>V6211</b>	131 (59.4)	8" x 10 <sup>3</sup> / <sub>4</sub> " to 8 <sup>1</sup> / <sub>2</sub> " x 11 <sup>1</sup> / <sub>2</sub> "	20 <sup>3</sup> / <sub>4</sub> (527)	36 <sup>1</sup> / <sub>2</sub> " 927	40" 1013)
<b>V5212</b>	106 (48.0)	<b>V6212</b>	133 (60.3)	8 <sup>3</sup> / <sub>4</sub> " x 11 <sup>3</sup> / <sub>4</sub> " to 9 <sup>1</sup> / <sub>4</sub> " x 12 <sup>1</sup> / <sub>2</sub> "	20 <sup>3</sup> / <sub>4</sub> (527)	36 <sup>1</sup> / <sub>2</sub> " 927	40" 1013)
<b>V5213</b>	108 (49.0)	<b>V6213</b>	135 (61.2)	9 <sup>1</sup> / <sub>2</sub> " x 12 <sup>3</sup> / <sub>4</sub> " to 10 <sup>1</sup> / <sub>4</sub> " x 13 <sup>1</sup> / <sub>2</sub> "	20 <sup>3</sup> / <sub>4</sub> (527)	36 <sup>1</sup> / <sub>2</sub> " 927	40" 1013)
<b>V5214</b>	111 (50.3)	<b>V6214</b>	138 (62.6)	9 <sup>3</sup> / <sub>4</sub> " x 13 <sup>3</sup> / <sub>4</sub> " to 10 <sup>3</sup> / <sub>4</sub> " x 14 <sup>1</sup> / <sub>2</sub> "	22 <sup>3</sup> / <sub>4</sub> (578)	40 <sup>1</sup> / <sub>2</sub> " 1028	40" 1013)

Measurements in ( ) denote metric millimeters, unless otherwise specified.

### Optional Accessories

- 220 VAC 50Hz
- 208/240 VAC 60Hz
- 8" (203 mm) vertical one-piece push handle
- Bottom perimeter bumper

**HEATED MODELS**  
**Electrical Specifications**  
 900 Watts, 7.5 Amps, 120VAC



Lakeside Manufacturing, Inc.  
 4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.  
 800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com