

CONVECTION HEATED WAX BASE DISPENSERS



Item Numbers

- DXIDWB20900
- DXIDWB30900



Application

The Convection Heated Wax Base Dispenser is designed for Dinex Wax Bases used in extended meal time delivery applications.

Construction

The exterior is constructed of 18-gauge 300 stainless steel. The inner wall of the cabinet is constructed of .063 high strength aluminum. All sides and top of cabinet are insulated with superior rated insulation for heat retention and energy efficiency. The cabinet is mounted on four 3½" exclusive Dinex Performa swivel casters (two with brakes) with non-marking cushion tread wheel.

Heating System

The heating system is thermostatically controlled, using forced air to heat each cabinet for a combined 3200 watts (2 silo) and 4800 watts (3 silo). The compartment has a temperature range of 140°F to 330°F (60°C to 166°C) and is programmable. Unit is 208 Volt, 60 Hz, 1 Phase and features a 10' long 20 AMP power cord and NEMA 6-20P plug (2 silo) or NEMA 6-30P plug (3 silo).

Dispenser

Self-Leveling dispenser mechanisms are constructed of 304 stainless steel featuring springs that are isolated to protect from excessive and prolonged heat and therefore premature stretching. Springs are field adjustable without tools to accommodate a wide variety of plates. Each silo is factory set for Dinex 9" Wax Bases.

Programmability

A simple controller allows one to adjust the cavity temperatures from 140°F to 330°F (60°C to 166°C). It is factory preset for 330°F (166°C).

Capacity

- Each plate silo holds the large capacity of 60 Dinex Wax Bases.

Maintenance/Safety



Features latchless hinged lids for maximum convenience. Safety open lid catch prevents accidental lid closure. Casters have sealed bearings for low maintenance and increased maneuverability. Springs are certified and specially tempered to minimize spring adjustments over time. Units feature a 10' cord and cord wrap for layout changes and flexibility. Silos are removable and springs are adjustable without tools

Warranty



One year parts and labor.

We do not accept returns on any Dinex equipment or Dinex custom products. Please contact your local Dinex rep to ensure order accuracy prior to ordering.


CONVECTION HEATED WAX BASE DISPENSERS

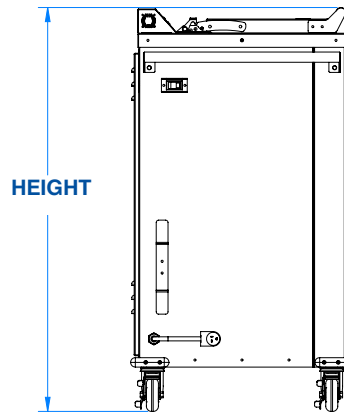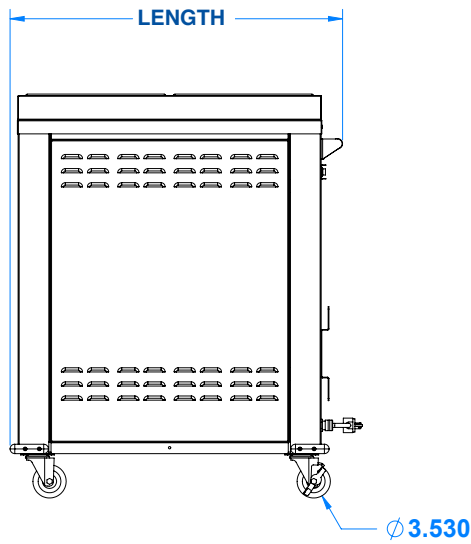

TOP VIEW

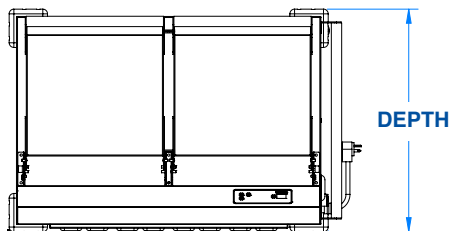

Nema 6-20P



Nema 6-30P

Items and Dimensions

ITEM NUMBER	MODEL NUMBER	LENGTH	DEPTH	HEIGHT	CASTERS		ELECTRICAL SPECIFICATIONS			SHIP WEIGHT	SHIP CUBE	NEMA PLUG
					TYPE	DIA.	WATT	AMP.	VOLTS			
DXIDWB20900	IDWB20900	35.36" (89.8 cm)	23.68" (60.1 cm)	42.96" (109.2 cm)	4 Swivel 2 w/brake	3 ½"	3200	15.4	208 60 HZ	260 lb (117.9 kg)	21.9	6-20P
DXIDWB30900	IDWB30900	45.00" (114.3 cm)	23.68" (60.1 cm)	42.96" (109.2 cm)	4 Swivel 2 w/brake	3 ½"	4800	23.1	208 60 HZ	320 lb (145 kg)	28.4	6-30P

Please confirm that you have the most current specification sheet by visiting www.dinex.com.
Dinex® reserves the right to change specifications and product design without notice.
Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.