

| Project:  | AIA# |
|-----------|------|
| tem:      |      |
| _ocation: | SIS# |
| Approved: |      |

# P-SERIES TOP MOUNT PASS-THRU FREEZER

#### MODEL: PFD1HC-1AS

PFD1HC-1AS Solid Door Reach-In Hydrocarbon Series



## **OPTIONS & ACCESSORIES**

- Stainless steel case back
- Additional shelves
- Shelf clips
- 3" or 6" Casters
- 6" Seismic legs
- Tray slides (type A & A/C)
- Door swing orientation (at time of order)
- Remote option\* (see note back on page)

# 3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

### **CABINET CONSTRUCTION**

- Exterior stainless steel front and side (galvanized top, bottom & back)
- Interior is made of corrosion resistant aluminum
- Stainless steel door liner
- Full electronic control
- Expansion valve technology
- Variable speed compressor technology
- Self-closing doors with 120° stay-open feature
- 22 Gauge stainless steel pass-thru doors
- LED interior light
- Cylinder locks
- Snap-in magnetic gaskets for positive door seal
- Hinged front shroud
- Energy saving thermal breaker
- Stainless steel breaker caps
- · Heavy-duty epoxy wire coated shelves
- 6" High adjustable stainless steel legs
- 8' Cord and plug (see electrical data for details)

### **REFRIGERATION SYSTEM**

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil, located out of the food zone
- Freezer capable of maintaining product temperature down to -10°F






3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



| MODEL                        | PFD1HC-1AS                |  |
|------------------------------|---------------------------|--|
| EXTERNAL DIMENSIONAL DATA    |                           |  |
| Width Overall                | 26 ½"                     |  |
| Depth Overall with Handle    | 38 <sup>3</sup> ⁄8"       |  |
| Height Overall               | 84 <sup>1</sup> ⁄8"       |  |
| Number of Doors              | 2                         |  |
| Depth with Door Open 90°     | 84 <sup>1</sup> ⁄4"       |  |
| Door Opening (in)            | 21 ½" x 54 ⁵⁄s"           |  |
| INTERNAL DIMENSIONAL DATA    |                           |  |
| NET Capacity (cubic ft.)     | 22.9                      |  |
| Internal Width Overall (in)  | 22 ½"                     |  |
| Internal Depth Overall (in)  | 26"                       |  |
| Internal Height Overall (in) | 56 ⁵∕₃"                   |  |
| No. of Shelves               | 3                         |  |
| ELECTRICAL DATA              |                           |  |
| Full Load Amperes* 115/60/1  | 9.1                       |  |
| REFRIGERATION DATA           |                           |  |
| Horsepower*                  | 3/4                       |  |
| Capacity (BTU/Hr)*           | Variable Speed Technology |  |
| SHIPPING DATA                |                           |  |
| Gross Weight (crated lbs)    | 471 lbs                   |  |
| Height - Crated              | 87"                       |  |
| Width - Crated               | 45"                       |  |
| Depth - Crated               | 35"                       |  |

#### Top Mount Pass-Thru F Model: PFD1HC-1AS

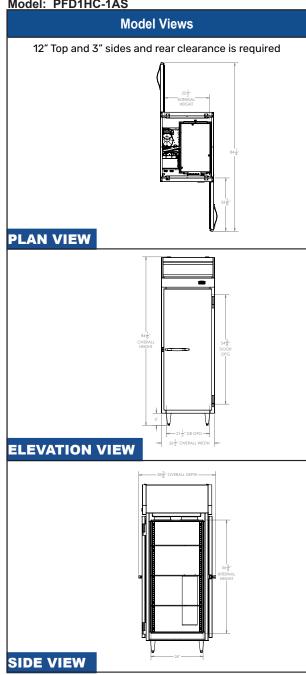

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.







an Ali Group Company

