E	EVERAGE-AIR.
---	--------------

<u> </u>					_
GF	BA	R E	PIVI	EN	

GF34HC Glass and Plate Froster Hydrocarbon Series

MODELS: GF34HC-B GF34HC-S





3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior is available in wear resistant vinyl on steel in black finish or stainless steel
- Interior construction utilizes galvanized steel
- Standard interior construction utilizes galvanized steel
- Top includes easy glide, stainless steel lids and stainless steel counter top with edge
- Two (2) shelves and bottom rack standard
- Two (2) shelf ledges standard with three (3) mounting points
- Flexibility in design provides for plate storage and chilling
- · Automatic defrost of coil is standard
- Built-in condensate evaporator system
- No floor drain or additional plumbing is needed

OPTIONS & ACCESSORIES

- Stainless steel interior
- Locks
- Horizontal mount thermometer
- Dial thermometer
- Remote option* (refrigerant must be specified at time of order, see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Adaptive defrost
- · Epoxy coated evaporator coil
- Chills glasses and plates at −10°F
















MODEL	GF34HC			
EXTERNAL DIMENSIONAL DATA				
Width Overall	34"			
Depth Overall	26 ½"			
Height Overall	33 ⁵⁄8"			
Number of Lids	1			
INTERNAL DIMENSIONAL DATA				
NET Capacity (cubic ft.)	6.4			
Internal Useable Width Overall (in)	25 %"			
Internal Depth Overall (in)	22"			
Internal Height Overall (in)	18 ⁵ ⁄s"			
Number of Shelves	2			
ELECTRICAL DATA				
Full Load Amperes	3.5			
REFRIGERATION DATA				
Horsepower*	1/2			
Capacity (BTU/Hr)*	1624			
SHIPPING DATA				
Gross Weight - Crated	224 lbs			
Height - Crated	38"			
Width - Crated	52"			
Depth - Crated	30"			

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Bar Equipment - Glass Froster

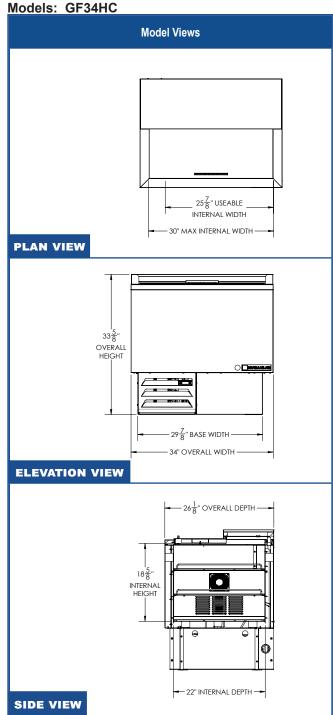













*ELECTRICAL CONNECTION



115/60/1

Units pre-wired at factory NEMA 5-15P and include 8' long cord and plug set.