

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

#### **P-SERIES WARMING CABINET**

PH1 Half-Solid Door Pass-Thru Warming Cabinet





PH1-1HS-PT

#### **OPTIONS & ACCESSORIES**

- Pan slides
- 3" or 6" Casters

# 3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- Stainless steel exterior and interior
- Operational indicator panel contains thermometer and adjustable thermostat control which is accurately calibrated from 80°F to 180°F
- Manually controlled humidity vents are provided in the top of the cabinet
- Self closing doors with safety stops
- Heavy-duty cylinder lock and self-adjusting magnetic gasket
- Stainless steel breaker
- Cam-lift hinges
- Anti-microbial door handles
- Three (3) silver freeze shelves
- 6" Adjustable legs standard

#### **ELECTRICAL SYSTEM**

- 15 AMP breaker required for single door units
- Strip type 750-watt heating elements, operating on 208-240/60/1, having a total of 1500 watts per compartment.
- Externally mounted blower system maintains even temperature through out the food zone area.


















MODEL	PH1-1HS-PT
EXTERNAL DIMENSIONAL DATA	
Width Overall	26 1/2"
Depth Overall with Handle	38 3/8"
Height Overall	83 3/4"
Number of Doors	4
Depth with Door Open 90°	84 1/4"
Door Opening (in)	21 1/2" x 25 1/4"
INTERNAL DIMENSIONAL DATA	INTERNAL DIMENSIONAL
NET Capacity (cubic ft.)	20.6
Internal Width Overall (in)	22 1/2"
Internal Depth Overall (in)	26"
Internal Height Overall (in)	56 1/2"
Number of Shelves	3
ELECTRICAL DATA	
Cabinet Voltage 208-240/60/1	208-240/60/1
Max. Fuse Size T.D.	15 AMPS
Feed Wires	2
Heater Watts per section (@240V)	1500
Total Wattage (Heaters & Fan @240V)	1500
Total AMPS	6.3
WEIGHT DATA	
Gross Weight (Crated lbs)	340 lbs
Height - Crated	82"
Width - Crated	29 1/2"
Depth - Crated	37 1/2"

## **Warming Cabinet** Model: PH1-1HS-PT

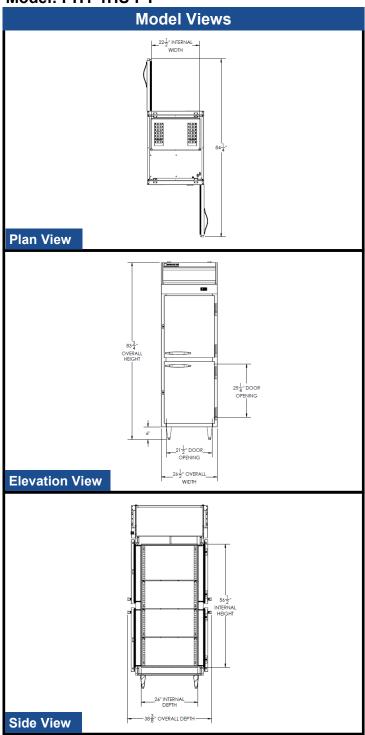

### **ELECTRICAL CONNECTION**



Units pre-wired at factory and include 8' long cord and plug set.











