

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

WTR SHALLOW DEPTH WORKTOP

WTR20HC Foamed-in Place Worktop Refrigerator Hydrocarbon Series MODELS: WTR20HC-FIP



WTR20HC-FIP

OPTIONS & ACCESSORIES

- ☐ Stainless steel back and grille
- Stainless steel interior
- Right or left hinged door
- Locks (solid doors only)
- ☐ Wire shelf divider
- Cutting board
- ☐ 3" Casters or 6" legs
- □ Low profile casters
- Remote option

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides and door, (galvanized steel back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Foamed-in place top
- Interior thermometer is standard
- Self-closing doors with 120° stay-open feature, on cartridge style hinges
- Easy door removal for service and cleaning
- Magnetic gasket attached to each door for positive seal
- Painted aluminum door handle
- 6" Casters, two (2) with brakes standard
- Two epoxy-coated steel wire shelves standard
- Field reversible door
- Maintains product temperature between 36°F and 38°F

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil


















MODEL	WTR20HC-FIP
EXTERNAL DIMENSIONAL DATA	
Width Overall	20"
Depth Overall with Handle & Bumper	24 1/2"
Height Overall with 6" Casters	36 1/8"
Number of Doors	1
Depth with Door Open 90°	40 3/4"
Door Opening (in)	15 5/8" x 18 1/8"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	2.25
Internal Width Overall (in)	16"
Internal Depth Overall (in)	16 3/8"
Internal Depth Useable (in)	Upper 11" Lower 8 1/4"
Internal Height Overall (in)	19 1/2"
Internal Height Useable (in)	12 1/2
Number of Shelves	2
ELECTRICAL DATA	
Full Load Amperes 115/60/1	2.0
REFRIGERATION DATA	
Horsepower	1/10
Capacity (BTU/Hr)*	1110
WEIGHT DATA	
Gross Weight (Crated lbs)	124 lb
Height - Crated	35"
Width - Crated	23"
Depth - Crated	26"

Worktop Refrigerators - Shallow Depth

Models: WTR20HC-FIP

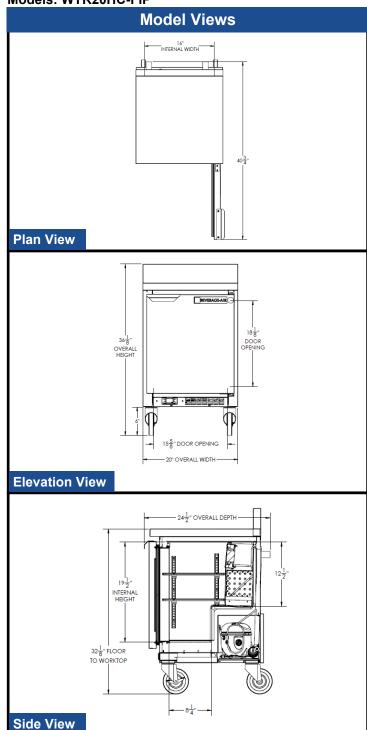

ELECTRICAL CONNECTION















Units pre-wired at factory and include 8' long cord and plug set.



