



Project \_\_\_\_\_

Item # \_\_\_\_\_

Quantity \_\_\_\_\_

# Glo-Ray® Built-In Rectangular Heated Shelves with Recessed Top

Models: GRSB-24-F, -I, -O; -30-F, -I, -O; -36-F, -I, -O; -42-F, -I, -O; -48-F, -I, -O; -54-I; -60-F, -I, -O; -66-I; -72-F, -I, -O

Let Hatco add heat to your serving surface with the Glo-Ray® Rectangular Built-In Heated Shelf with Recessed Top. This .5" (13 mm) recessed top foodwarmer has a hardcoated aluminum surface and blanket-type element for uniform heat to extend your food holding time. Fiberglass insulation keeps heat at the holding surface while a built-in adjustable thermostat controls surface temperature.

## Standard features

- Uniform heat distribution with hardcoated aluminum surface
- GRSB models available in widths from 24" to 72" (610-1829 mm) and depths of 15.5", 19.5" or 30" (394, 495 or 762 mm) and blanket-type element
- 36" (914 mm) flexible conduit channels power lines from the shelf to a control box
- Standard control includes thermostat, lighted rocker switch and mounting brackets.
- Thermostatically-controlled heated base
- The Built-in Heated Shelf has a .75" (19 mm) flanged edge that allows the unit to fit into a countertop opening
- Recommended for use in metallic counters. For other surfaces, verify that the material is suitable for temperature up to 200°F (93°C)♦

♦ Hatco is not responsible for counter damage caused by heat from the warmer.  
\* Models with flush mount recessed electronic control box are not CE approved.

**Note for Built-in Heated Shelves with overhead Strip Heaters:** For any size GRSB, the next larger size GRA or GR2A Strip Heater will fit over the top. For example, a GRSB-30 will require a GRA-36 or GR2A-36. The GRA will have a tight fit to the frame of the base. The GR2A will have approximately a 4" (102 mm) space.

IFB anti-microbial coatings use naturally-occurring, environmentally sustainable, silver ions to help inhibit the growth of microbes on the powder coated surface. See [www.hatcocorp.com/antimicrobial-paint](http://www.hatcocorp.com/antimicrobial-paint) for more information.

For operation, location and safety information, please refer to the Installation and Operating Manual.



GRSB-24-I



GRSB-84-I with Accessory Channel Dividers (vertical, with notches) and Stainless Steel Rods (horizontal)

## Options (available at time of purchase only)

Designer Colors for Flush Mount Control Bezel Box – Stainless Steel is standard – Non-standard colors are non-returnable

- Warm Red  Black  Gray Granite  White Granite
- Navy Blue  Hunter Green  Antique Copper

- Flush Mount Electronic Control Box with Lighted Power Switch with cord and plug\*
- Flush Mount Thermostatic Control Box with Lighted Power Switch with cord and plug

Conduit in lieu of standard 3' (914 mm) (Flush Mount ITC Control Box only)  
 6' (1829 mm) conduit  10' (3048 mm) conduit

## Accessories

- Channel Dividers - notched - sold in pairs
- GRSB-24 models  GRSB-30 models  GRSB-36 models
  - GRSB-42 models  GRSB-48 models  GRSB-54 models
  - GRSB-60 models  GRSB-66 models  GRSB-72 models

- Stainless Steel Rods - sold individually
- F depth -15.5" (394 mm)  I depth -19.5" (495 mm)
  - O depth - 30" (762 mm)



Standard Control Box

Optional flush mount recessed thermostatic control box with lighted On/Off rocker switch and angled recessed controls

Optional flush mount recessed electronic control box with lighted On/Off rocker switch and angled recessed controls



HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350



[www.hatcocorp.com](http://www.hatcocorp.com) | [support@hatcocorp.com](mailto:support@hatcocorp.com) | [Find a Hatco Rep](#) | [Image Library](#) | [Document Library](#) | [Chat](#)



# Glo-Ray® Recessed Built-In Heated Shelves

Models: GRSB-24-F, -I, -O; -30-F, -I, -O; -36-F, -I, -O; -42-F, -I, -O; -48-F, -I, -O; -54-I; -60-F, -I, -O; -66-I; -72-F, -I, -O

## GRSB Models Shown with Standard Control Box

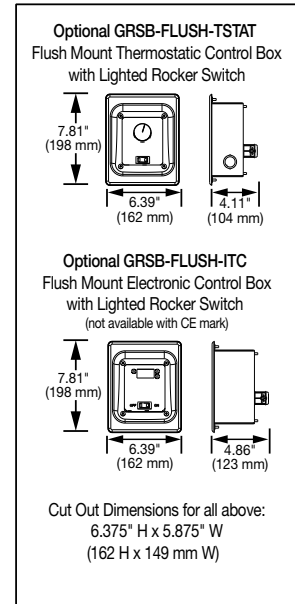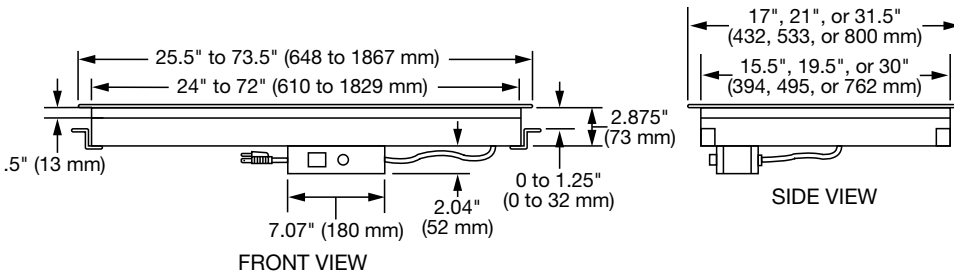


## GRSB Built-In Countertop Cut-Out Dimensions

| Model     | Minimum Width   | Maximum Width    | Minimum Depth  | Maximum Depth   |
|-----------|-----------------|------------------|----------------|-----------------|
| GRSB-24-F | 24.5" (622 mm)  | 24.75" (629 mm)  | 16" (406 mm)   | 16.25" (413 mm) |
| GRSB-24-I | 24.5" (622 mm)  | 24.75" (629 mm)  | 20" (508 mm)   | 20.25" (514 mm) |
| GRSB-24-O | 24.5" (622 mm)  | 24.75" (629 mm)  | 30.5" (775 mm) | 30.75" (781 mm) |
| GRSB-30-F | 30.5" (775 mm)  | 30.75" (781 mm)  | 16" (406 mm)   | 16.25" (413 mm) |
| GRSB-30-I | 30.5" (775 mm)  | 30.75" (781 mm)  | 20" (508 mm)   | 20.25" (514 mm) |
| GRSB-30-O | 30.5" (775 mm)  | 30.75" (781 mm)  | 30.5" (775 mm) | 30.75" (781 mm) |
| GRSB-36-F | 36.5" (927 mm)  | 36.75" (933 mm)  | 16" (406 mm)   | 16.25" (413 mm) |
| GRSB-36-I | 36.5" (927 mm)  | 36.75" (933 mm)  | 20" (508 mm)   | 20.25" (514 mm) |
| GRSB-36-O | 36.5" (927 mm)  | 36.75" (933 mm)  | 30.5" (775 mm) | 30.75" (781 mm) |
| GRSB-42-F | 42.5" (1080 mm) | 42.75" (1086 mm) | 16" (406 mm)   | 16.25" (413 mm) |
| GRSB-42-I | 42.5" (1080 mm) | 42.75" (1086 mm) | 20" (508 mm)   | 20.25" (514 mm) |
| GRSB-42-O | 42.5" (1080 mm) | 42.75" (1086 mm) | 30.5" (775 mm) | 30.75" (781 mm) |
| GRSB-48-F | 48.5" (1232 mm) | 48.75" (1238 mm) | 16" (406 mm)   | 16.25" (413 mm) |
| GRSB-48-I | 48.5" (1232 mm) | 48.75" (1238 mm) | 20" (508 mm)   | 20.25" (514 mm) |
| GRSB-48-O | 48.5" (1232 mm) | 48.75" (1238 mm) | 30.5" (775 mm) | 30.75" (781 mm) |
| GRSB-54-I | 54.5" (1384 mm) | 54.75" (1391 mm) | 20" (508 mm)   | 20.25" (514 mm) |
| GRSB-60-F | 60.5" (1537 mm) | 60.75" (1543 mm) | 16" (406 mm)   | 16.25" (413 mm) |
| GRSB-60-I | 60.5" (1537 mm) | 60.75" (1543 mm) | 20" (508 mm)   | 20.25" (514 mm) |
| GRSB-60-O | 60.5" (1537 mm) | 60.75" (1543 mm) | 30.5" (775 mm) | 30.75" (781 mm) |
| GRSB-66-I | 66.5" (1689 mm) | 66.75" (1695 mm) | 20" (508 mm)   | 20.25" (514 mm) |
| GRSB-72-F | 72.5" (1842 mm) | 72.75" (1848 mm) | 16" (406 mm)   | 16.25" (413 mm) |
| GRSB-72-I | 72.5" (1842 mm) | 72.75" (1848 mm) | 20" (508 mm)   | 20.25" (514 mm) |
| GRSB-72-O | 72.5" (1842 mm) | 72.75" (1848 mm) | 30.5" (775 mm) | 30.75" (781 mm) |

## CORD LOCATION

Cord is attached to Control Box.

## PLUG CONFIGURATIONS

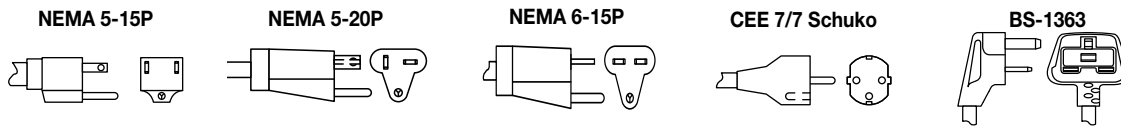

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350

[www.hatcocorp.com](http://www.hatcocorp.com) | [support@hatcocorp.com](mailto:support@hatcocorp.com) | [Find a Hatco Rep](#) | [Image Library](#) | [Document Library](#) | [Chat](#)



# Glo-Ray® Recessed Built-In Heated Shelves

Models: GRSB-24-F, -I, -O; -30-F, -I, -O; -36-F, -I, -O; -42-F, -I, -O; -48-F, -I, -O; -54-I; -60-F, -I, -O; -66-I; -72-F, -I, -O

## SPECIFICATIONS

### Built-In Rectangular Heated Shelves with Recessed Top

The shaded areas contain electrical information for International models

| Model     | Dimensions (W x D x H)                        | Usable Shelf (W x D)          | Volts        | Phase  | Watts     | Amps    | Plug           | Ship Weight*    |
|-----------|---|-------------------------------|--------------|--------|-----------|---------|----------------|-----------------|
| GRSB-24-F | 25.5" x 17" x 2.875"<br>(648 x 432 x 73 mm)   | 24" x 15.5"<br>(610 x 394 mm) | 120          | Single | 420       | 3.5     | NEMA 5-15P     | 25 lbs. (11 kg) |
|           |   |                               | 220          |        | 384       | 1.7     | CEE 7/7 Schuko | 25 lbs. (11 kg) |
|           |   |                               | 240          |        | 458       | 1.9     | BS-1363        |                 |
|           |   |                               | 220-230 (CE) |        | 384-420   | 1.7-1.8 | CEE 7/7 Schuko |                 |
|           |   |                               | 230-240 (CE) |        | 420-458   | 1.8-1.9 | BS-1363        |                 |
| GRSB-24-I | 25.5" x 21" x 2.875"<br>(648 x 533 x 73 mm)   | 24" x 19.5"<br>(610 x 495 mm) | 100          | Single | 550       | 5.5     | NEMA 5-15P     | 28 lbs. (13 kg) |
|           |   |                               | 120          |        | 550       | 4.6     | NEMA 5-15P     | 28 lbs. (13 kg) |
|           |   |                               | 220          |        | 550       | 2.5     | CEE 7/7 Schuko | 28 lbs. (13 kg) |
|           |   |                               | 240          |        | 550       | 2.3     | BS-1363        |                 |
|           |   |                               | 220-230 (CE) |        | 550-601   | 2.5-2.6 | CEE 7/7 Schuko |                 |
|           |   |                               | 230-240 (CE) |        | 505-550   | 2.2-2.3 | BS-1363        |                 |
| GRSB-24-O | 25.5" x 31.5" x 2.875"<br>(648 x 800 x 73 mm) | 24" x 30"<br>(610 x 762 mm)   | 120          | Single | 790       | 6.6     | NEMA 5-15P     | 33 lbs. (15 kg) |
|           |   |                               | 220          |        | 722       | 3.3     | CEE 7/7 Schuko | 33 lbs. (15 kg) |
|           |   |                               | 240          |        | 860       | 3.4     | BS-1363        |                 |
|           |   |                               | 220-230 (CE) |        | 722-790   | 3.3-3.4 | CEE 7/7 Schuko |                 |
|           |   |                               | 230-240 (CE) |        | 790-860   | 3.4-3.6 | BS-1363        |                 |
| GRSB-30-F | 31.5" x 17" x 2.875"<br>(800 x 432 x 73 mm)   | 30" x 15.5"<br>(762 x 394 mm) | 120          | Single | 505       | 4.2     | NEMA 5-15P     | 25 lbs. (11 kg) |
|           |   |                               | 220          |        | 462       | 2.1     | CEE 7/7 Schuko | 25 lbs. (11 kg) |
|           |   |                               | 240          |        | 550       | 2.3     | BS-1363        |                 |
|           |   |                               | 220-230 (CE) |        | 462-505   | 2.1-2.2 | CEE 7/7 Schuko |                 |
|           |   |                               | 230-240 (CE) |        | 505-550   | 2.2-2.3 | BS-1363        |                 |
| GRSB-30-I | 31.5" x 21" x 2.875"<br>(800 x 533 x 73 mm)   | 30" x 19.5"<br>(762 x 495 mm) | 100          | Single | 665       | 6.7     | NEMA 5-15P     | 29 lbs. (13 kg) |
|           |   |                               | 120          |        | 665       | 5.6     | NEMA 5-15P     | 29 lbs. (13 kg) |
|           |   |                               | 220          |        | 665       | 3.0     | CEE 7/7 Schuko | 29 lbs. (13 kg) |
|           |   |                               | 240          |        | 665       | 2.8     | BS-1363        |                 |
|           |   |                               | 220-230 (CE) |        | 665-727   | 3.0-3.2 | CEE 7/7 Schuko |                 |
|           |   |                               | 230-240 (CE) |        | 611-665   | 2.7-2.8 | BS-1363        |                 |
| GRSB-30-O | 31.5" x 31.5" x 2.875"<br>(800 x 800 x 73 mm) | 30" x 30"<br>(762 x 762 mm)   | 120          | Single | 950       | 7.9     | NEMA 5-15P     | 37 lbs. (17 kg) |
|           |   |                               | 220          |        | 916       | 4.2     | CEE 7/7 Schuko | 37 lbs. (17 kg) |
|           |   |                               | 240          |        | 985       | 4.5     | BS-1363        |                 |
|           |   |                               | 220-230 (CE) |        | 916-1001  | 4.2-4.4 | CEE 7/7 Schuko |                 |
|           |   |                               | 230-240 (CE) |        | 904-985   | 3.9-4.1 | BS-1363        |                 |
| GRSB-36-F | 37.5" x 17" x 2.875"<br>(953 x 432 x 73 mm)   | 36" x 15.5"<br>(914 x 394 mm) | 120          | Single | 590       | 4.9     | NEMA 5-15P     | 26 lbs. (12 kg) |
|           |   |                               | 220          |        | 540       | 2.5     | CEE 7/7 Schuko | 26 lbs. (12 kg) |
|           |   |                               | 240          |        | 642       | 2.7     | BS-1363        |                 |
|           |   |                               | 220-230 (CE) |        | 540-590   | 2.5-2.6 | CEE 7/7 Schuko |                 |
|           |   |                               | 230-240 (CE) |        | 590-643   | 2.6-2.7 | BS-1363        |                 |
| GRSB-36-I | 37.5" x 21" x 2.875"<br>(953 x 533 x 73 mm)   | 36" x 19.5"<br>(914 x 495 mm) | 100          | Single | 780       | 7.8     | NEMA 5-15P     | 30 lbs. (14 kg) |
|           |   |                               | 120          |        | 780       | 6.5     | NEMA 5-15P     | 30 lbs. (14 kg) |
|           |   |                               | 220          |        | 780       | 3.5     | CEE 7/7 Schuko | 30 lbs. (14 kg) |
|           |   |                               | 240          |        | 780       | 3.3     | BS-1363        |                 |
|           |   |                               | 220-230 (CE) |        | 780-853   | 3.5-3.7 | CEE 7/7 Schuko |                 |
|           |   |                               | 230-240 (CE) |        | 716-780   | 3.1-3.3 | BS-1363        |                 |
| GRSB-36-O | 37.5" x 31.5" x 2.875"<br>(953 x 800 x 73 mm) | 36" x 30"<br>(914 x 762 mm)   | 120          | Single | 1110      | 9.3     | NEMA 5-15P     | 37 lbs. (17 kg) |
|           |   |                               | 220          |        | 1110      | 5.0     | CEE 7/7 Schuko | 37 lbs. (17 kg) |
|           |   |                               | 240          |        | 1110      | 4.6     | BS-1363        |                 |
|           |   |                               | 220-230 (CE) |        | 1110-1213 | 5.0-5.3 | CEE 7/7 Schuko |                 |
|           |   |                               | 230-240 (CE) |        | 1020-1110 | 4.4-4.6 | BS-1363        |                 |

\* Shipping weight includes packaging.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350

 [www.hatcocorp.com](http://www.hatcocorp.com) | [support@hatcocorp.com](mailto:support@hatcocorp.com) | [Find a Hatco Rep](#) | [Image Library](#) | [Document Library](#) | [Chat](#)



# Glo-Ray® Recessed Built-In Heated Shelves

Models: GRSB-24-F, -I, -O; -30-F, -I, -O; -36-F, -I, -O; -42-F, -I, -O; -48-F, -I, -O; -54-I; -60-F, -I, -O; -66-I; -72-F, -I, -O

## SPECIFICATIONS

### Built-In Rectangular Heated Shelves with Recessed Top

The shaded areas contain electrical information for international models

| Model     | Dimensions (W x D x H)                         | Usable Shelf (W x D)           | Volts        | Phase  | Watts     | Amps    | Plug           | Ship Weight*    |
|-----------|--|--------------------------------|--------------|--------|-----------|---------|----------------|-----------------|
| GRSB-42-F | 43.5" x 17" x 2.875"<br>(1105 x 432 x 73 mm)   | 42" x 15.5"<br>(1067 x 394 mm) | 120          | Single | 685       | 5.7     | NEMA 5-15P     | 30 lbs. (14 kg) |
|           |  |                                | 220          |        | 627       | 2.9     | CEE 7/7 Schuko |                 |
|           |  |                                | 240          |        | 746       | 3.1     | BS-1363        |                 |
|           |  |                                | 220-230 (CE) |        | 627-685   | 2.9-3.0 | CEE 7/7 Schuko |                 |
|           |  |                                | 230-240 (CE) |        | 685-746   | 3.0-3.1 | BS-1363        |                 |
| GRSB-42-I | 43.5" x 21" x 2.875"<br>(1105 x 533 x 73 mm)   | 42" x 19.5"<br>(1067 x 495 mm) | 100          | Single | 885       | 8.9     | NEMA 5-15P     | 37 lbs. (17 kg) |
|           |  |                                | 120          |        | 885       | 7.4     | NEMA 5-15P     |                 |
|           |  |                                | 220          |        | 885       | 4.0     | CEE 7/7 Schuko |                 |
|           |  |                                | 240          |        | 885       | 3.7     | BS-1363        |                 |
|           |  |                                | 220-230 (CE) |        | 885-967   | 4.0-4.2 | CEE 7/7 Schuko |                 |
|           |  |                                | 230-240 (CE) |        | 813-885   | 3.5-3.7 | BS-1363        |                 |
| GRSB-42-O | 43.5" x 31.5" x 2.875"<br>(1105 x 800 x 73 mm) | 42" x 30"<br>(1067 x 762 mm)   | 120          | Single | 1270      | 10.6    | NEMA 5-15P     | 46 lbs. (21 kg) |
|           |  |                                | 220          |        | 1236      | 5.6     | CEE 7/7 Schuko |                 |
|           |  |                                | 240          |        | 1305      | 5.4     | BS-1363        |                 |
|           |  |                                | 220-230 (CE) |        | 1236-1351 | 5.6-5.9 | CEE 7/7 Schuko |                 |
|           |  |                                | 230-240 (CE) |        | 1198-1305 | 5.2-5.4 | BS-1363        |                 |
| GRSB-48-F | 49.5" x 17" x 2.875"<br>(1257 x 432 x 73 mm)   | 48" x 15.5"<br>(1219 x 394 mm) | 120          | Single | 770       | 6.4     | NEMA 5-15P     | 33 lbs. (15 kg) |
|           |  |                                | 220          |        | 705       | 3.2     | CEE 7/7 Schuko |                 |
|           |  |                                | 240          |        | 828       | 3.5     | BS-1363        |                 |
|           |  |                                | 220-230 (CE) |        | 704-770   | 3.2-3.3 | CEE 7/7 Schuko |                 |
|           |  |                                | 230-240 (CE) |        | 770-839   | 3.3-3.5 | BS-1363        |                 |
| GRSB-48-I | 49.5" x 21" x 2.875"<br>(1257 x 533 x 73 mm)   | 48" x 19.5"<br>(1219 x 495 mm) | 100          | Single | 1000      | 10.0    | NEMA 5-15P     | 40 lbs. (18 kg) |
|           |  |                                | 120          |        | 1000      | 8.3     | NEMA 5-15P     |                 |
|           |  |                                | 220          |        | 1000      | 4.5     | CEE 7/7 Schuko |                 |
|           |  |                                | 240          |        | 1000      | 4.2     | BS-1363        |                 |
|           |  |                                | 220-230 (CE) |        | 1000-1093 | 4.5-4.7 | CEE 7/7 Schuko |                 |
|           |  |                                | 230-240 (CE) |        | 918-1000  | 4.0-4.2 | BS-1363        |                 |
| GRSB-48-O | 49.5" x 31.5" x 2.875"<br>(1257 x 800 x 73 mm) | 48" x 30"<br>(1219 x 762 mm)   | 120          | Single | 1430      | 11.9    | NEMA 5-15P     | 68 lbs. (31 kg) |
|           |  |                                | 220          |        | 1430      | 6.5     | CEE 7/7 Schuko |                 |
|           |  |                                | 240          |        | 1430      | 6.0     | BS-1363        |                 |
|           |  |                                | 220-230 (CE) |        | 1430-1562 | 6.5-6.8 | CEE 7/7 Schuko |                 |
|           |  |                                | 230-240 (CE) |        | 1313-1430 | 5.7-6.0 | BS-1363        |                 |
| GRSB-54-I | 55.5" x 21" x 2.875"<br>(1410 x 533 x 73 mm)   | 54" x 19.5"<br>(1372 x 495 mm) | 100          | Single | 1110      | 11.1    | NEMA 5-15P     | 45 lbs. (21 kg) |
|           |  |                                | 120          |        | 1110      | 9.3     | NEMA 5-15P     |                 |
|           |  |                                | 220          |        | 1110      | 5.0     | CEE 7/7 Schuko |                 |
|           |  |                                | 240          |        | 1110      | 4.6     | BS-1363        |                 |
|           |  |                                | 220-230 (CE) |        | 1110-1213 | 5.0-5.3 | CEE 7/7 Schuko |                 |
|           |  |                                | 230-240 (CE) |        | 1019-1110 | 4.4-4.6 | BS-1363        |                 |
| GRSB-60-F | 61.5" x 17" x 2.875"<br>(1562 x 432 x 73 mm)   | 60" x 15.5"<br>(1524 x 394 mm) | 120          | Single | 950       | 7.9     | NEMA 5-15P     | 40 lbs. (18 kg) |
|           |  |                                | 220          |        | 870       | 4.0     | CEE 7/7 Schuko |                 |
|           |  |                                | 240          |        | 1034      | 4.3     | BS-1363        |                 |
|           |  |                                | 220-230 (CE) |        | 869-950   | 4.0-4.1 | CEE 7/7 Schuko |                 |
|           |  |                                | 230-240 (CE) |        | 950-1035  | 4.1-4.3 | BS-1363        |                 |
| GRSB-60-I | 61.5" x 21" x 2.875"<br>(1562 x 533 x 73 mm)   | 60" x 19.5"<br>(1524 x 495 mm) | 100          | Single | 1220      | 12.2    | NEMA 5-15P     | 43 lbs. (20 kg) |
|           |  |                                | 120          |        | 1220      | 10.2    | NEMA 5-15P     |                 |
|           |  |                                | 220          |        | 1220      | 5.5     | CEE 7/7 Schuko |                 |
|           |  |                                | 240          |        | 1220      | 5.1     | BS-1363        |                 |
|           |  |                                | 220-230 (CE) |        | 1220-1333 | 5.5-5.8 | CEE 7/7 Schuko |                 |
|           |  |                                | 230-240 (CE) |        | 1120-1220 | 4.9-5.1 | BS-1363        |                 |
| GRSB-60-O | 61.5" x 31.5" x 2.875"<br>(1562 x 800 x 73 mm) | 60" x 30"<br>(1524 x 762 mm)   | 120          | Single | 1750      | 14.6    | NEMA 5-20P     | 64 lbs. (29 kg) |
|           |  |                                | 220          |        | 1750      | 8.0     | CEE 7/7 Schuko |                 |
|           |  |                                | 240          |        | 1750      | 7.3     | BS-1363        |                 |
|           |  |                                | 220-230 (CE) |        | 1750-1912 | 8.0-8.3 | CEE 7/7 Schuko |                 |
|           |  |                                | 230-240 (CE) |        | 1607-1750 | 7.0-7.3 | BS-1363        |                 |

\* Shipping weight includes packaging.

HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607

(414) 671-6350



[www.hatcocorp.com](http://www.hatcocorp.com)

[support@hatcocorp.com](mailto:support@hatcocorp.com)

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Chat](#)



# Glo-Ray® Recessed Built-In Heated Shelves

Models: GRSB-24-F, -I, -O; -30-F, -I, -O; -36-F, -I, -O; -42-F, -I, -O; -48-F, -I, -O; -54-I; -60-F, -I, -O; -66-I; -72-F, -I, -O

## SPECIFICATIONS

### Built-In Rectangular Heated Shelves with Recessed Top

The shaded areas contain electrical information for International models

| Model     | Dimensions (W x D x H)                         | Usable Shelf (W x D)           | Volts        | Phase  | Watts     | Amps    | Plug           | Ship Weight*    |
|-----------|--|--------------------------------|--------------|--------|-----------|---------|----------------|-----------------|
| GRSB-66-I | 67.5" x 21" x 2.875"<br>(1715 x 533 x 73 mm)   | 66" x 19.5"<br>(1676 x 495 mm) | 120          | Single | 1330      | 11.1    | NEMA 5-15P     | 49 lbs. (22 kg) |
|           |  |                                | 220          |        | 1330      | 6.0     | CEE 7/7 Schuko | 49 lbs. (22 kg) |
|           |  |                                | 240          |        | 1330      | 5.5     | BS-1363        |                 |
|           |  |                                | 220-230 (CE) |        | 1330-1454 | 6.0-6.3 | CEE 7/7 Schuko |                 |
|           |  |                                | 230-240 (CE) |        | 1221-1330 | 5.3-5.5 | BS-1363        |                 |
| GRSB-72-F | 73.5" x 17" x 2.875"<br>(1867 x 432 x 73 mm)   | 72" x 15.5"<br>(1829 x 394 mm) | 120          | Single | 1130      | 9.4     | NEMA 5-15P     | 43 lbs. (20 kg) |
|           |  |                                | 220          |        | 1034      | 4.7     | CEE 7/7 Schuko | 43 lbs. (20 kg) |
|           |  |                                | 240          |        | 1230      | 5.1     | BS-1363        |                 |
|           |  |                                | 220-230 (CE) |        | 1034-1130 | 4.7-4.9 | CEE 7/7 Schuko |                 |
|           |  |                                | 230-240 (CE) |        | 1130-1231 | 4.9-5.1 | BS-1363        |                 |
| GRSB-72-I | 73.5" x 21" x 2.875"<br>(1867 x 533 x 73 mm)   | 72" x 19.5"<br>(1829 x 495 mm) | 120          | Single | 1440      | 12.0    | NEMA 5-15P     | 50 lbs. (23 kg) |
|           |  |                                | 220          |        | 1440      | 6.5     | CEE 7/7 Schuko | 50 lbs. (23 kg) |
|           |  |                                | 240          |        | 1440      | 6.0     | BS-1363        |                 |
|           |  |                                | 220-230 (CE) |        | 1440-1574 | 6.5-6.8 | CEE 7/7 Schuko |                 |
|           |  |                                | 230-240 (CE) |        | 1322-1440 | 5.8-6.0 | BS-1363        |                 |
| GRSB-72-O | 73.5" x 31.5" x 2.875"<br>(1867 x 800 x 73 mm) | 72" x 30"<br>(1829 x 762 mm)   | 208          | Single | 2070      | 10.0    | NEMA 6-15P     | 68 lbs. (31 kg) |
|           |  |                                | 240          |        | 2070      | 8.6     |                |                 |
|           |  |                                | 220          |        | 2070      | 9.4     | CEE 7/7 Schuko | 68 lbs. (31 kg) |
|           |  |                                | 240          |        | 2070      | 8.6     | BS-1363        |                 |
|           |  |                                | 220-230 (CE) |        | 2070-2262 | 9.4-9.8 | CEE 7/7 Schuko |                 |
|           |  |                                | 230-240 (CE) |        | 1901-2070 | 8.3-8.6 | BS-1363        |                 |

\* Shipping weight includes packaging.

## PRODUCT SPECS

### Glo-Ray® Built-In Heated Shelves with Recessed Top

The Built-in Rectangular Heated Shelf with Recessed Top shall be a Glo-Ray® model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Rectangular Heated Shelf shall be rated at ... watts, ... volts, and ... inches (millimeters) in overall width.

It shall consist of thermostatically-controlled heated base with 3' (914 mm) conduit to control box and a 6' (1829 mm) cord with plug attached.

Accessories shall include and Channel Dividers and Stainless Steel Rods.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350



[www.hatcocorp.com](http://www.hatcocorp.com)

[support@hatcocorp.com](mailto:support@hatcocorp.com)

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Chat](#)