

### COMMERCIAL

# **Refrigeration Equipment Merchandiser Refrigerator, 23** cu.ft - 1 Glass Door, black (R290)

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



738248 (KCHGM26R)

1-glass door merchandiser refrigerator, black, 23 cubic feet, R290 refrigerant gas, +33/+41°F

# **Short Form Specification**

### Item No.

1-glass door refrigerator with exterior back and bottom panel in galvanized steel, exterior side and top in painted steel; interior back, side top and bottom panels in 304 stainless steel. Electronic control.

R290 gas in refrigeration circuit. ETL Safety and Sanitation certified.

3/5 Years warranty.

### **Main Features**

- External temperature display.
- · Removable door gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- · Automatic Defrost Cooling System provides worryfree performance.
- Heavy duty Vinyl coated steel shelves.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmetal impact.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Interior LED light to save energy and for best internal visibility.

# Construction

- Lockable door.
- · Electronic control to select temperatures.
- Pre-wired heavy duty power cord.
- · Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.


# **Optional Accessories**

shelf clips	PNC 88061

# APPROVAL:



# Refrigeration Equipment Merchandiser Refrigerator, 23 cu.ft - 1 Glass Door, black (R290)

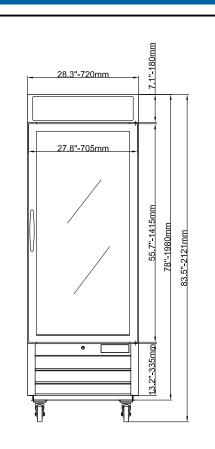

# Side 33.7"-856mm 31.7"-806mm El = Electrical connection Rl = Refrigerant Inlet R0 = Refrigerant Outlet

### **Electric**

**Front** 

Supply voltage:

**738248 (KCHGM26R)** 115 V/1 ph/60 Hz

Electrical power, max: 0.3 kW
Current consumption: 3 Amps

Plug type: USA NEMA 5-15P

### **Key Information:**

Capacity (Cu.Ft.) 23

Door hinges: Right Side

External dimensions, Width: 28 5/16" (720 mm)
External dimensions, Depth: 33 7/8" (856 mm)
External dimensions, Height: 80 1/2" (2121 mm)

Number and type of doors: 1 Glass Internal Dimensions (depth): 62 1/2" Internal Dimensions (height): 28 3/8" Internal Dimensions (width): 25 3/16"

**Shipping height:** 83 1/16" (2180 mm) **Shipping weight:** 342 lbs (155 kg)

Number and type of grids

(included): 4 - Vinyl-Coated Steel

Type of external material: Black Prepainted Steel

Type of internal material: White Prepainted Aluminium

Warranty: 3 / 5 years

# **Refrigeration Data**

Compressor Horsepower: 1/5
Refrigerant type: R290
Refrigerant weight: 85 g
Operating temperature min.: 32 °F
Operating temperature max.: 41 °F
Condenser type: Fin & tube
Defrost type: Auto Defrost







