

ROYAL SERIES PLUMBING

4" CENTER WALL MOUNT PRE-RINSE

MODEL: 1/-	-124WL	PROJECT:	ITEM #:	QTY:	
------------	--------	----------	---------	------	--

PRODUCT IMAGE



17-124WL SHOWN

17-124WL ONLY AVAILABLE IN LOW LEAD COMPLIANT MODEL

STANDARD FEATURES

- 1/4 turn high performance ceramic cartridge valves with built-in back flow preventers
- Heavy-Duty flanges with eccentric fittings for quick installation
- Base constructed of chrome plated brass
- Mounting kit included ($\frac{1}{2}$ " NPT x 1 $\frac{1}{2}$ " male nipples with locknuts)
- Pre-assembled at factory to cut installation time
- 44" heavy-duty stainless steel clad flexible hose. Tested to 400 PSI
- Wall bracket included
- Full replacement parts available
- 1 Year Warranty
- Low Lead Compliance
 Meets California AB-1953 and Vermont S152 standards

SPECIFICATIONS

- 4" on center wall mount with 1/2" NPT male inlets
- 36" high with 15" overhang
- Riser Pipe with Hook: 3/8" NPT x 18". Pre-assembled to base at factory
- Water Saver Spray Head: 1 1/2 GPM @ 60 PSI flow rate complies with EPAct 2005
- Rough in: Two ⁷/₈" round holes on 4" centers
- Temperature Range: 40°F to 180°F
- Flow rate: 2 GPM max
- Shipping weight: 12 lbs.



APPROVED BY:

CERTIFICATIONS:

Due to our commitment to continued product improvement, specifications are subject to change without notice.




ROYAL SERIES PLUMBING

4" CENTER WALL MOUNT PRE-RINSE

MODEL: PROJECT: ITEM #: QTY:	
------------------------------	--

DRAWING

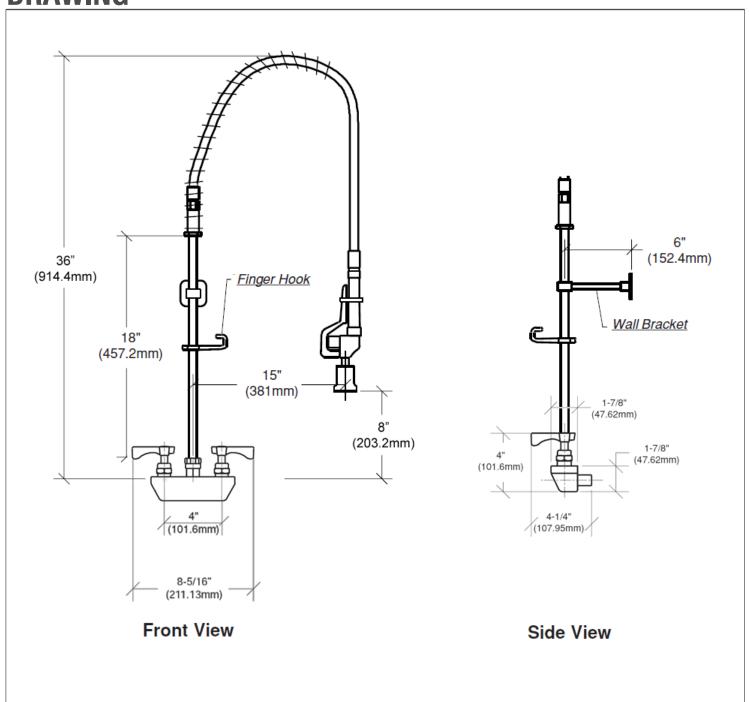



APPROVED BY:

CERTIFICATIONS:

Printed in the USA

Due to our commitment to continued product improvement, specifications are subject to change without notice.