BEVERAGE-AIR

Project: _____	AIA#
Item: _____	
Location: _____	SIS#
Approved:	

CHEF BASE REFRIGERATOR

MODEL: WTRCS112HC-120

WTRCS112HC Six Drawer With Extended Top Chef Base Hydrocarbon Series



3 Year Parts/Labor Warranty
Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, drawers and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- 120” Extended top has full marine edge to prevent spills from dripping over sides
- Full electronic control
- One-piece, snap-in magnetic drawer gasket
- 12-Gauge stainless steel drawer slides with Delrin® rollers rated at 275 lbs
- Lifetime warranty on all drawers and slides
- Heavy duty, fire-proof, reinforced insulated 16 gauge top
- No heat shield required (must adhere to proper clearance per owners manual)
- Accommodates 6” deep full size food service pans (not included)
- Self-closing drawer feature
- Compressor available on left or right, specify at time of unit order
- 3” Casters, 2 with brakes standard

OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- Additional pan supports
- 6” Adjustable legs, 6” seismic legs
- 6” Casters
- Gasket guards
- Flat top overhang
  (up to 6” overhang on each side)
- Remote option*
  (refrigerant must be specified at time of order, see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Non-electric defrost with hot gas condensate evapoation
- Maintains product temperature 36ºF to 38ºF

WTRCS112HC CHEF BASE REFRIGERATOR

Please verify qualifying units by visiting:
www.energystar.gov/cfs

3779 Champion Blvd., Winston-Salem, NC 27105
1-888-845-9800 Fax: 1-336-245-6453
Beverage-Air.com Sales@bevair.com

BEVERAGE-AIR

Chef Base Refrigerator
Model: WTRCS112HC-120

MODEL	WTRCS112HC-120
EXTERNAL DIMENSIONAL DATA	
Width Overall	120”
Depth Overall (with handle & bumper)	34 3/4”
Height Overall (with casters)	24 3/8”
Number of Drawers	6
Depth with Drawers Extended	57 3/4”
Drawer Opening (in)	(L) 27 3/8” x 6 1/2” (R) 40 3/8” x 6 1/2”
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	24.36
Internal Width Overall (in)	98 7/8”
Internal Depth Overall (in)	26”
Internal Height Overall (in)	16 3/8”
ELECTRICAL DATA	
Full Load Amperes	5.0
REFRIGERATION DATA	
Horsepower*	1/3
Capacity (BTU/Hr)*	1997
WEIGHT DATA	
Gross Weight	850 lbs
Height - Crated	27”
Width - Crated	125”
Depth - Crated	38”

*NOTE: Remote units are field wired and comes with 6” legs.
Refrigerant must be specified at time of order.

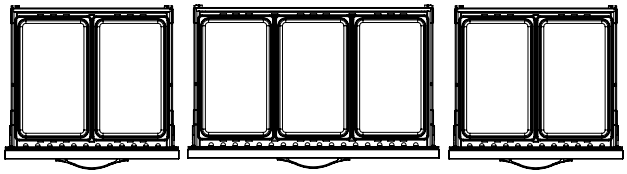

(Per left drawer) (Per left drawer) (Per left drawer)

Model Views

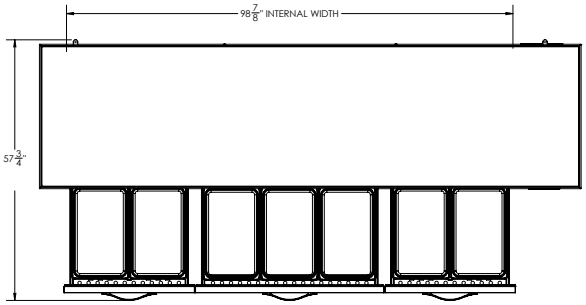

PLAN VIEW

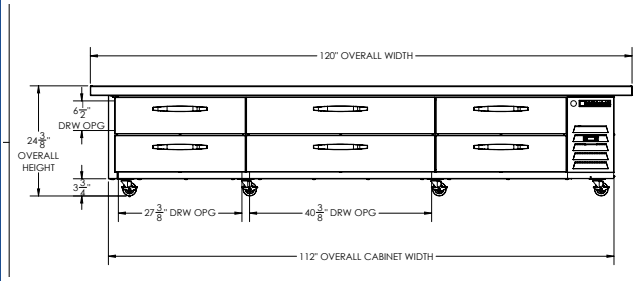

ELEVATION VIEW



SIDE VIEW

*ELECTRICAL CONNECTION

115/60/1 NEMA 5-15P

Units pre-wired at factory and include 8’ long cord and plug set.